Stage 4 - Finishing the Unit

1. The Front Flap can be zipped open and tied up if required. The cover can be attached to the frame by the ties at the base of the unit. Then place the unit in the desired location. See Dia 13


2. Feed 4 x PE Pulling Cord through the four top corner loops.

3. Hammer 4 Ground Nails(13) into the ground approximately 45 degrees out from the four top corners.
   Connect the Rope Tabs to the four PE Pulling Cord(12). Then attach PE Pulling Cord to Ground Nails and tighten cord with the Rope Tab.

4. Secure the PE Pulling Cord (12) to the Ground Nail (13).

NOTE: This greenhouse is a light weight structure and should be secured in place if located outside. Place in sheltered location. Take inside during high winds.

Dia 13

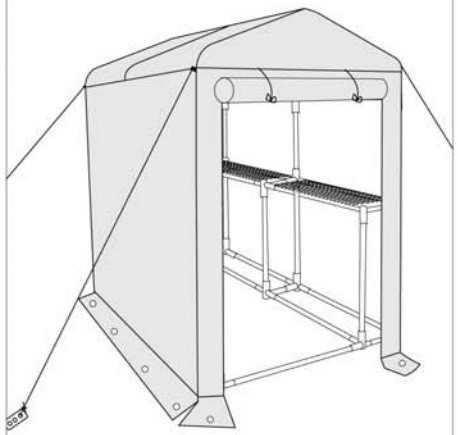

CARE AND MAINTENANCE


Safety
To avoid any risk of suffocation to animals or children dispose of the plastic bags immediately.

Cleaning
Clean all surfaces with a damp cloth and mild detergent, do not use bleach or abrasive products.

ARGOS LIMITED
489-499AVEBURY BOULEVARD
SAXON GATE WEST
CENTRAL MILTON KEYNES,MK9 2NW,U.K.

ARGOS

Large walk in Greenhouse
7201998

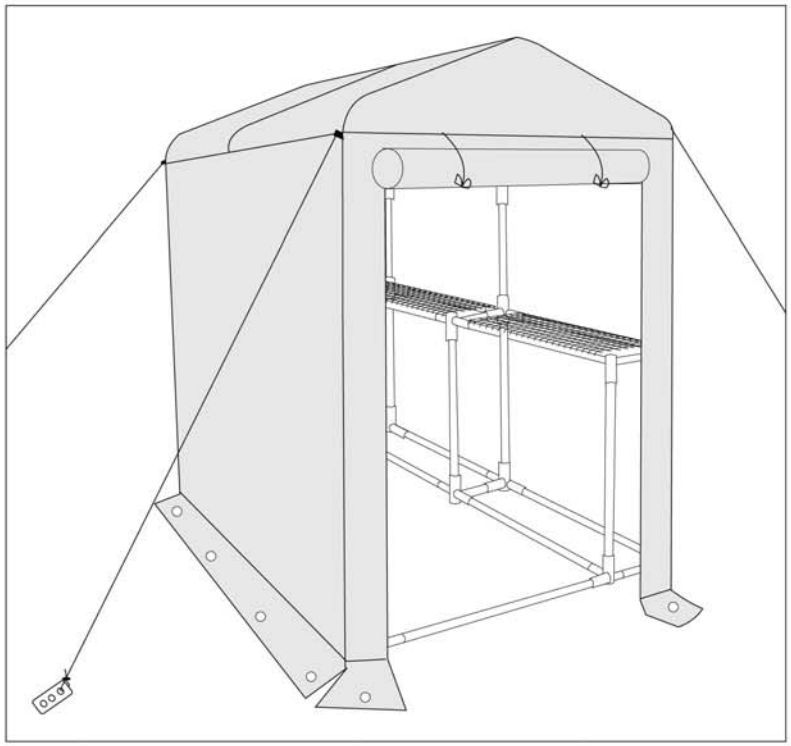

Versatile Greenhouse - Components

1. COMPONENT LIST

① 3 x Top Frame(Approx.514mm)



② 6 x L-Tube(Approx.514mm)



③ 2 x Long Tube(Approx. 1170mm)



④ 16 x Long Tube(Approx.895mm)



⑤ 6 x Short Tube(Approx.250mm)




⑥ 6 x Medium Tube(Approx.730mm)



⑦ 2 x Long Tube (Approx.898mm)



⑧ 2 x T-Tube(Approx. 850mm)



⑨ 1 x H-Tube(Approx. 850mm)



⑩ 3 x Medium Tube(Approx.692mm)



⑪ 3 x Medium Tube(Approx.770mm)




⑫ 4 x PE Pulling Cord

⑬ 16 x Ground Nail


⑭ 4 x Rope Tab



⑮ 2 x Mesh Gill (Approx. 790 x295mm)

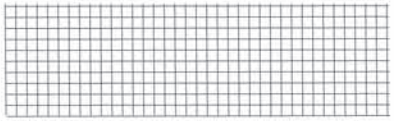

⑯ 1 x Cover

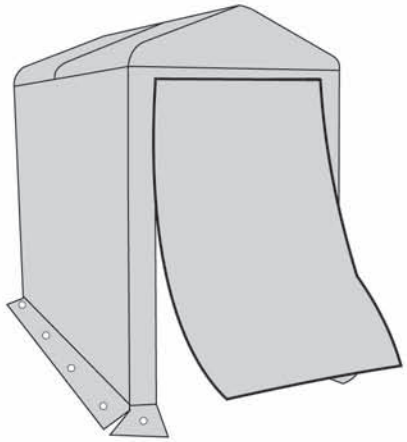


2. FITTINGS


Ⓐ 12 x Joint



Ⓑ 6 x Joint



Ⓒ (C) 3 x Joint



Versatile Greenhouse - Assembly Instructions

IMPORTANT

1. Read these instructions carefully and familiarise yourself with the procedure before assembling the unit.
2. Check that you have all the component parts as listed on page 2 and familiarise yourself with each part before proceeding.
3. Take all the fittings out of the box and separate them into their groups.
4. Ensure you have enough space to lay out all the parts before assembly.
5. To avoid scratching it is recommend that you assemble the unit on a soft level surface.
6. Please unzip front door before adding cover to frame
7. Not suitable for using heater inside or near this product.


ASSEMBLY INSTRUCTIONS

Stage 1 - Fitting the Frame

NOTE: There are many of different kinds of Tubes. Ensure you check before assembly.
NOTE: If would be useful to ask someone to help you at this stage.
NOTE: Locate the unit on flat ground free from obstruction.


1. Insert Long Tubes(7) and Long Tubes(4) into Joints(A). Then insert the Long Tubes(4) into the H-Tube(9). See Dia 1.
Note: Shelf maybe fitted either left of right.

Dia 1

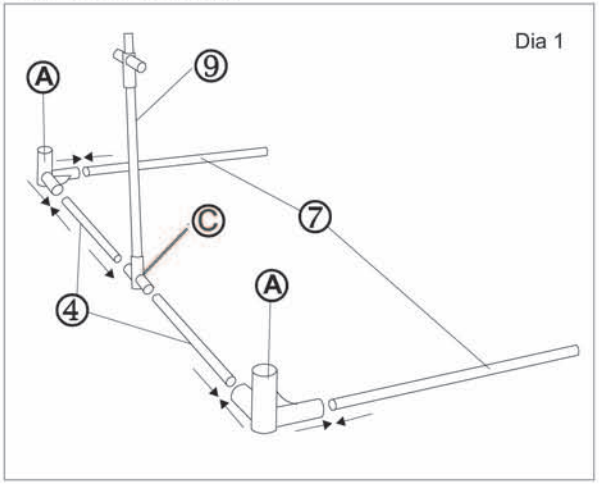


2. Insert the Long Tubes(4) into Joints(A) and Joints(B). Then insert the Short Tubes(5) into Joints(A) and Joints(B). See Dia 2.


Dia 2

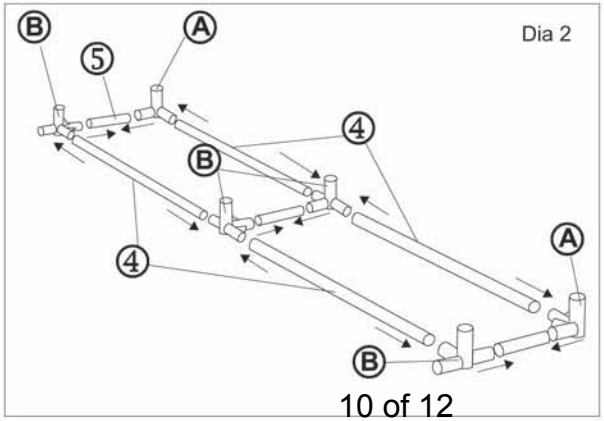


3. Combine the two finished parts together. See Dia 3.

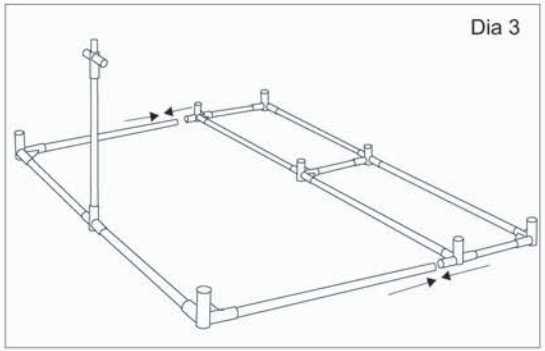

4. Insert the Long Tubes(4) into Joints(A) and Joints(B). Then insert the Short Tubes(5) into Joints(A) and Joints(B).
See Dia 4.

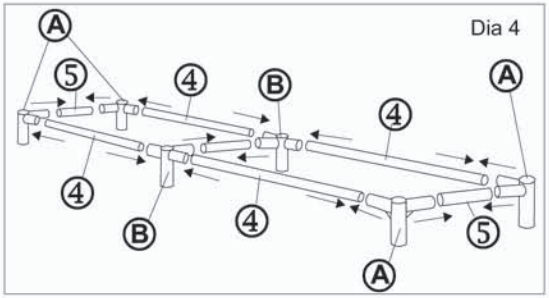


5. Insert the Medium Tubes(6) into Joints(A) and Joints(B).
See Dia 5.

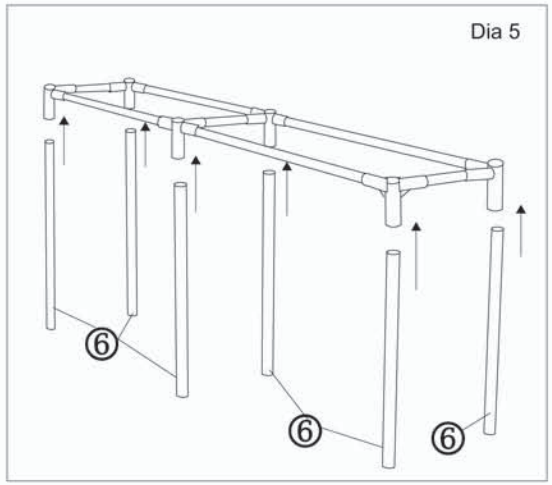


6. Insert the Medium Tubes(6) into the Frame. See Dia 6.


7. Insert the T-Tubes(8) into the finished unit. Then insert the Long Tubes(4) into the T-Tubes(8) and H-Tubes(9). See Dia 6.

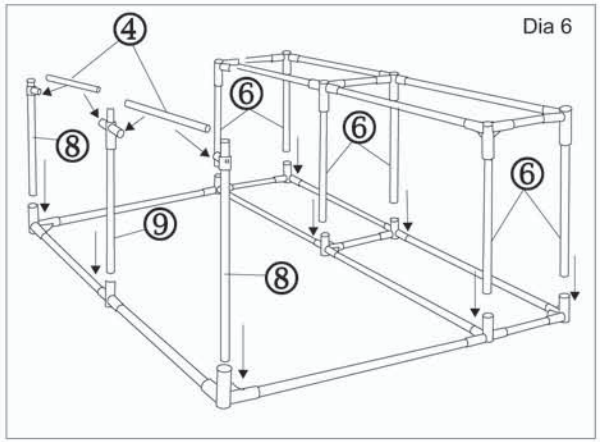

8. Insert the Medium Tubes(10) and the Medium Tubes(11) into the Frame. Then insert the Joint(A) and Joint(C) into the ends of the Tubes.
See Dia 7.

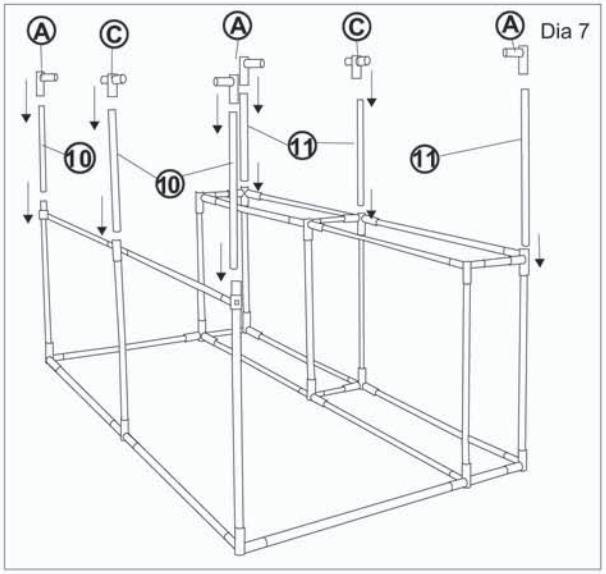


9. Insert the Long Tubes(4) and Long Tubes(3) into the unit.
See Dia 8.

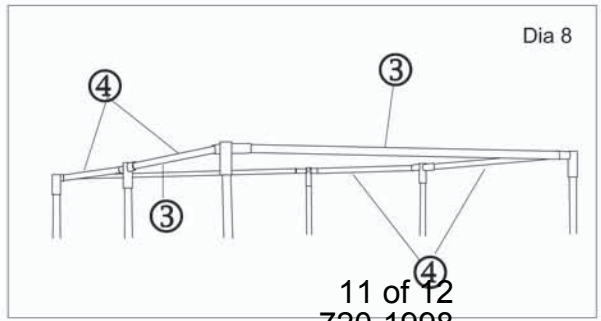


Stage 2 - Fitting Top Frames & Shelf s

1. Insert the L-Tube(2) into the end of Top Frame(1). Then follow the same method to produce another two Top Frames.
See Dia 9.

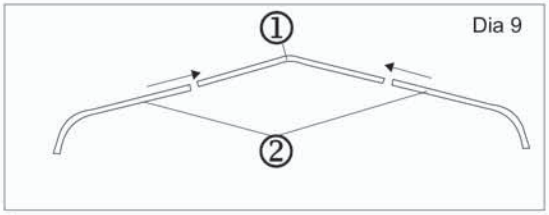


Dia 9

2. Insert the top frames onto the unit.
See Dia 10.

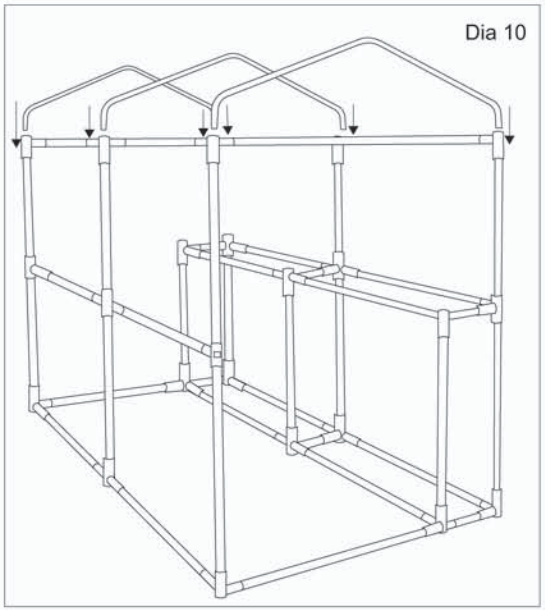
Dia 10

3. Place the Mesh Grill(15) onto the unit.
See Dia 11.

IMPORTANT: Do not overload the shelves as this may cause a hazard.

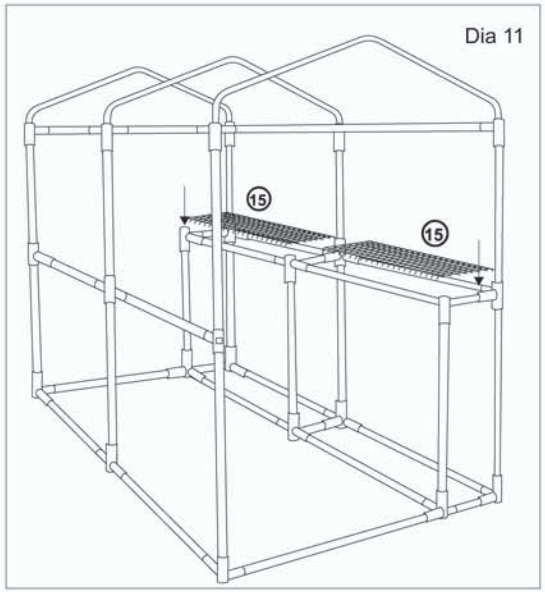

Dia 11


Versatile Greenhouse - Assembly Instructions

Stage 3 - Fitting the Cover

NOTE:
It would be useful to ask someone to help you at this stage.

Unzip the front door before fitting cover.

1. Place the Cover onto the unit.
See Dia 12.

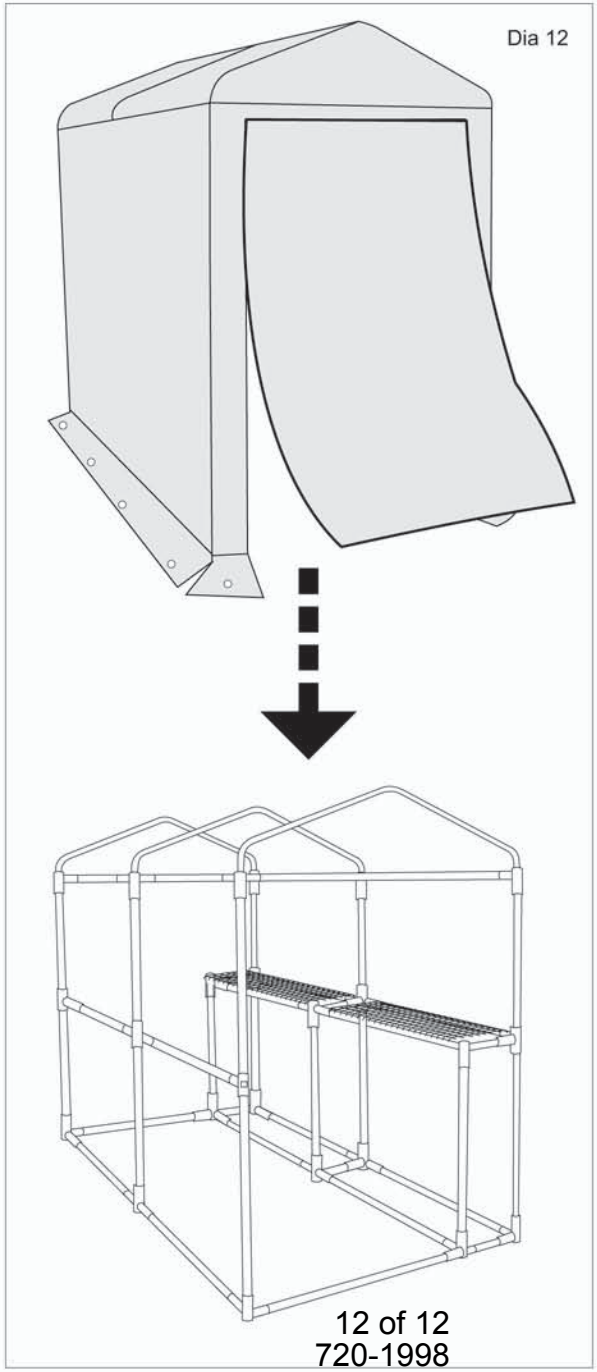
Dia 12

12 of 12
720-1998

Number	Picture	Qty	Number	Picture	Qty
1	143 cm approx	3	A		3
2	117 cm approx	2	B		1
3	89 cm approx	2	C		3
4	90 cm approx	16	D		6
5	24.5 cm approx	6	E		11
6	75.5 cm approx	15	F	(cover)	1
7		2	G		8
8	(ROPE)	4			

