
Geometric Media Storage Unit

Assembly Instructions - Please keep for future reference | 875/4585

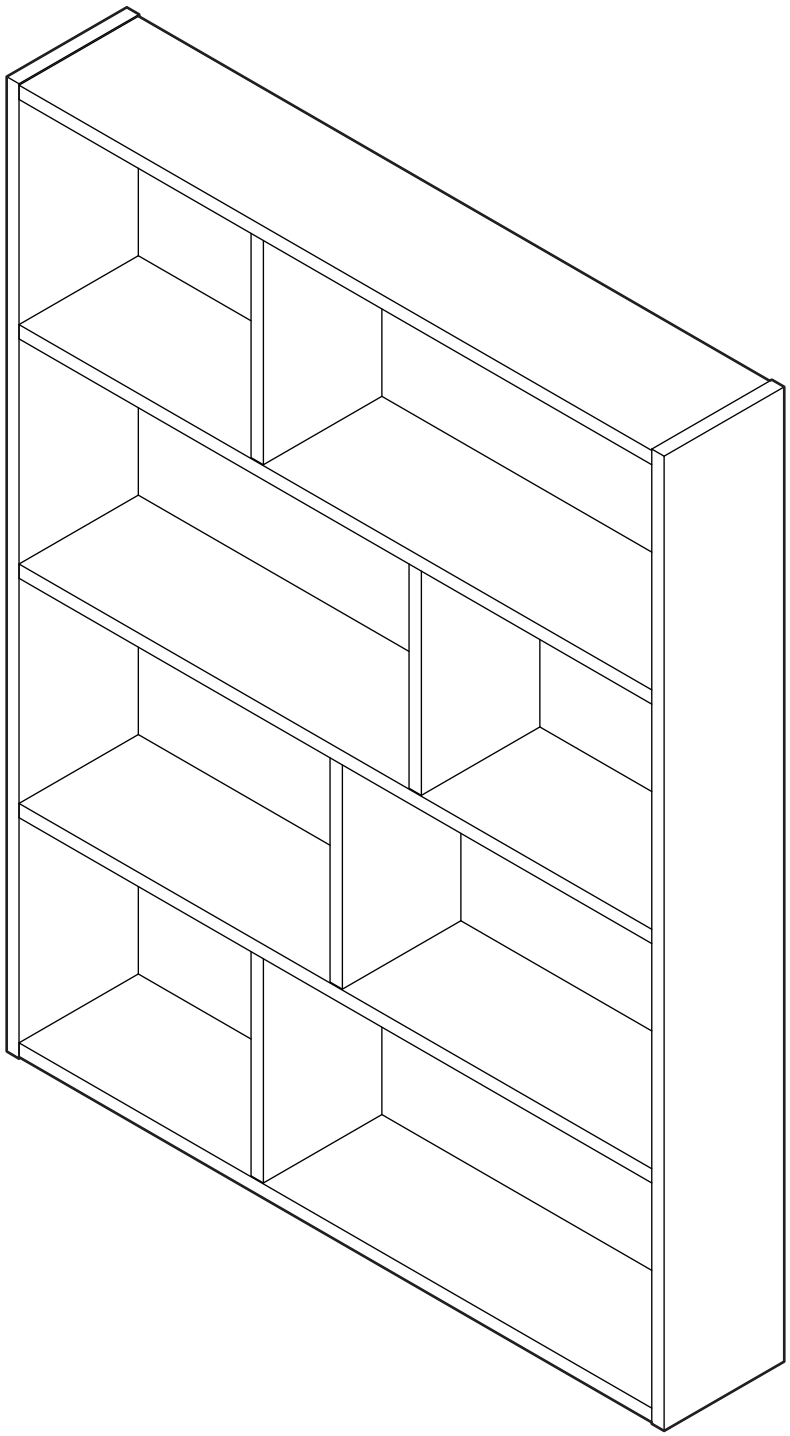

Dimensions

Width - 80cm
Depth - 14.9cm
Height - 102.7cm

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**

Ref. no. 875/4585 Date: 16/03/09

Safety and care advice

Important - Please read these instructions fully before starting assembly

• Check you have all the components and tools listed on pages 2 and 3.

• Remove all fittings from the plastic bags and separate them into their groups.

• Keep children and animals away from the work area, small parts could choke if swallowed.

• Make sure you have enough space to layout the parts before starting.

• Do not stand or put weight on the panels, this could cause damage.

• Assemble the unit as close to its final position (in the same room) as possible.

• Assemble on a soft level surface to avoid damaging the unit or your floor.

• ***Note:*** Only apply the glue once you are sure of the assembly.

• The wall plugs supplied are suitable for solid walls only. It is important that the correct type of fixing is used for your wall, seek professional advice if in doubt.

• Parts of the assembly will be easier with 2 people.

• If using power tools, please follow the safety instructions supplied with the tools.



• We do not recommend the use of power drill/ drivers for inserting screws, as this could damage the unit. Only use hand screwdrivers.

• ***Warning:*** Before drilling, check the wall for hidden pipes and cables.

• Dispose of all packaging carefully and responsibly.

• ***Warning:*** The unit weighs approximately 12.7kgs.
Please lift with care.

Glue safety - Take care when using glue, please follow the advice below

Skin contact: Remove contamination by washing with soap and water. This procedure should also be followed prior to eating and drinking.

Eye contact: Rinse immediately with clean water for 15 minutes and seek medical advice.

If swallowed: Seek medical advice immediately. If possible show product information or label to the medical advisor.

Care and maintenance

• Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.

• From time to time check that there are no loose screws on this unit.

• This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: if required the next page can be cut out and used as a reference throughout the assembly. Keep this page with these instructions for future reference.

Components - Panels


Please check you have all the panels listed below




1 Top Panel (769x145mm)



2 Shelf Panel (769x145cm)

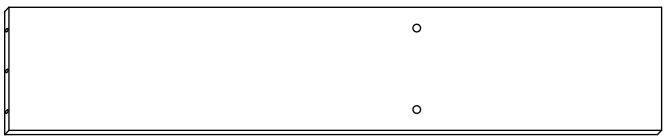


3 Centre Panel (769x145cm)

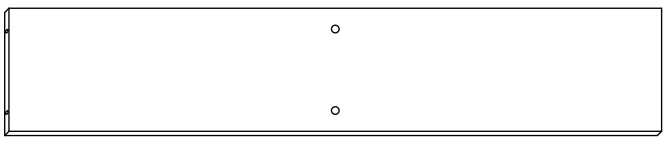


4 Shelf Panel (769x145cm)



5 Bottom Panel (769x145cm)

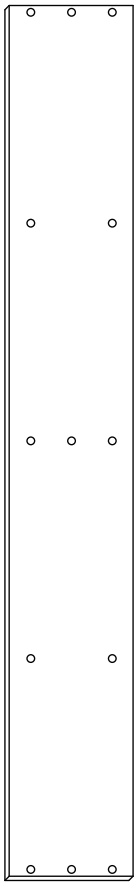

7 Side Panel x 2 (146x1026cm)



8 Support x 4 (237x144cm)





6 Back Panel (1020x794cm)

Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 08456 400800**


Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. in some cases more fittings may be supplied than are required.

A  Dowel x 28	**B**  50mm Screw x 8	**C**  Locking Pin x 6
D  Locking Nut x 6	**E**  Nail Guide x 1	**F**  Nail x 33
G  Glue x 1	**H**  Screw x 1	**J**  Wall Strap x 1

Tools required



Phillips screwdriver (medium & large)


Flatblade screwdriver (medium)



Bradawl (or sharp point)


Small hammer


Ruler/tape measure


Eye protection (when using a hammer or glue)

Ruler - Use this ruler to help correctly identify the screws



Assembly Instructions

Step 1

Fitting the Unit


NOTE: It would be useful to ask someone to help you at this stage.

a: Place a small amount of Glue Ⓖ into the dowel holes and onto the joints' surfaces. Use dowels Ⓐ fix Support [8] onto the Top Panel [1]. Use Screws Ⓑ to fix the Shelf Panel [2] onto the Support [8].


b: Place a small amount of Glue Ⓖ into the dowel holes and onto the joints' surfaces. Use dowels Ⓐ fix Support [8] onto the Shelf Panel [2]. Use Screws Ⓑ to fix the Centre Panel [3] onto the Support [8].

c: Place a small amount of Glue Ⓖ into the dowel holes and onto the joints' surfaces. Use dowels Ⓐ fix Support [8] onto the Centre Panel [3]. Use Screws Ⓑ to fix the Shelf Panel [4] onto the Support [8].


a:

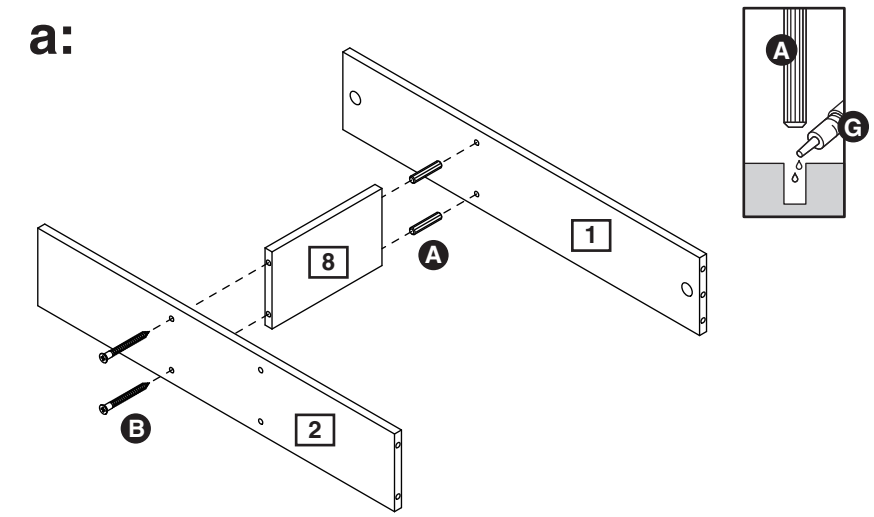

b:

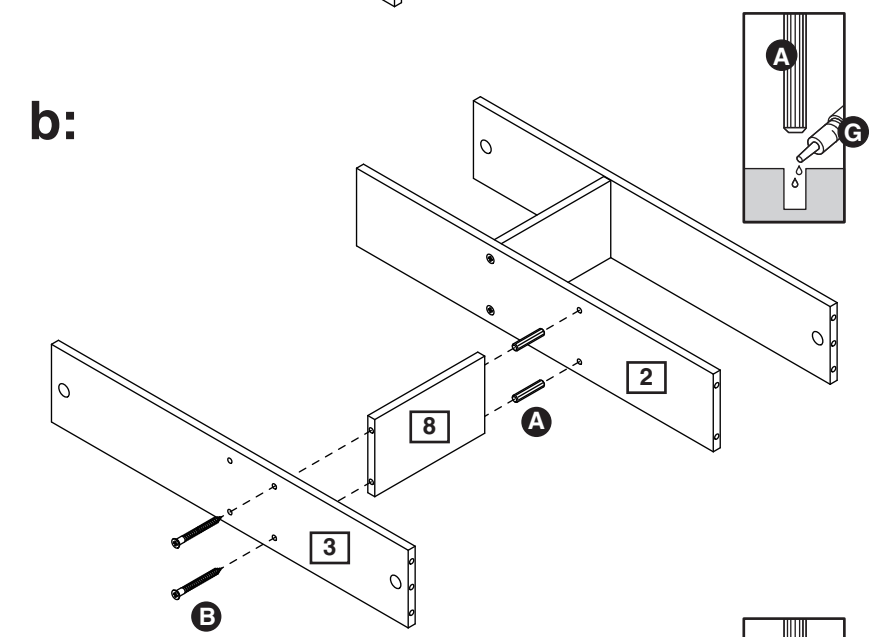

c:

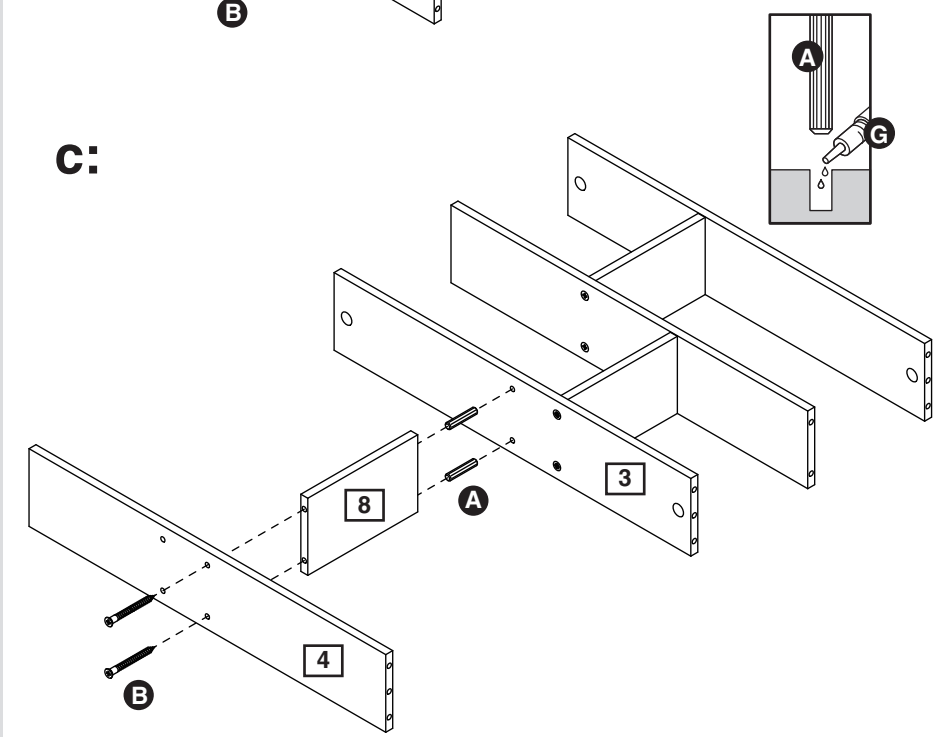


Assembly Instructions

Step 1


d: Place a small amount of Glue G into the dowel holes and onto the joints' surfaces. Use dowels A to fix Support 8 onto the Shelf Panel 4. Use Screws B to fix the Bottom Panel 5 onto the Support 8.

d:

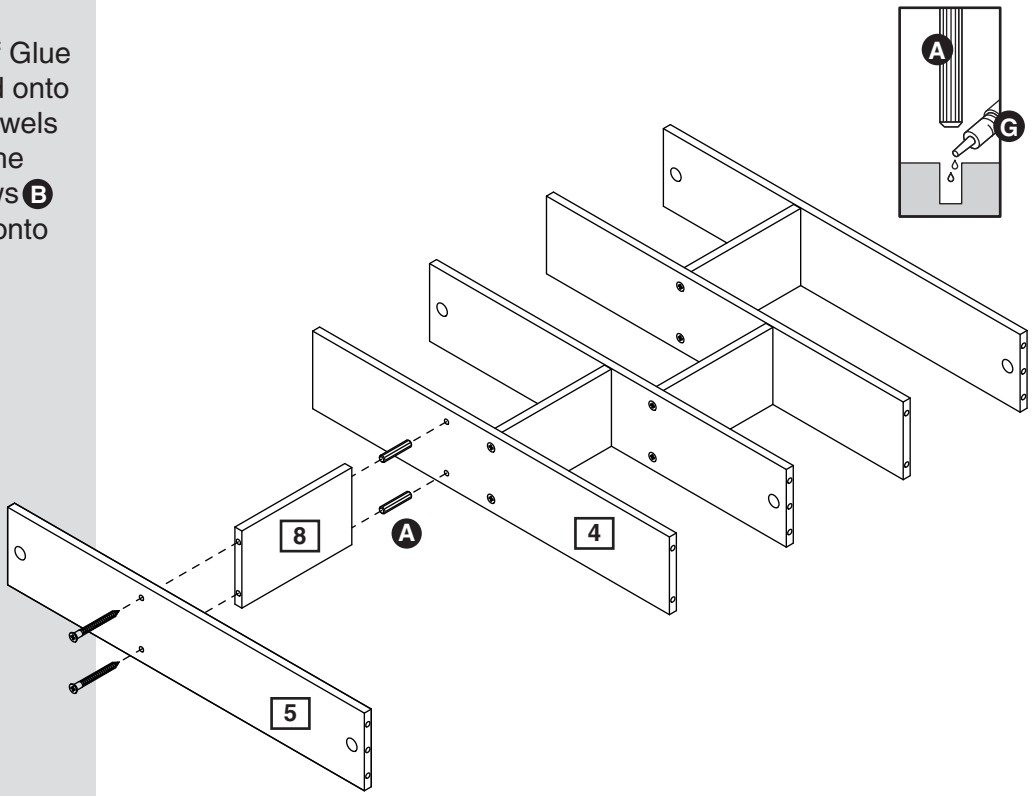

e: Screw in Locking Pins C into the Side Panel 7.

e:

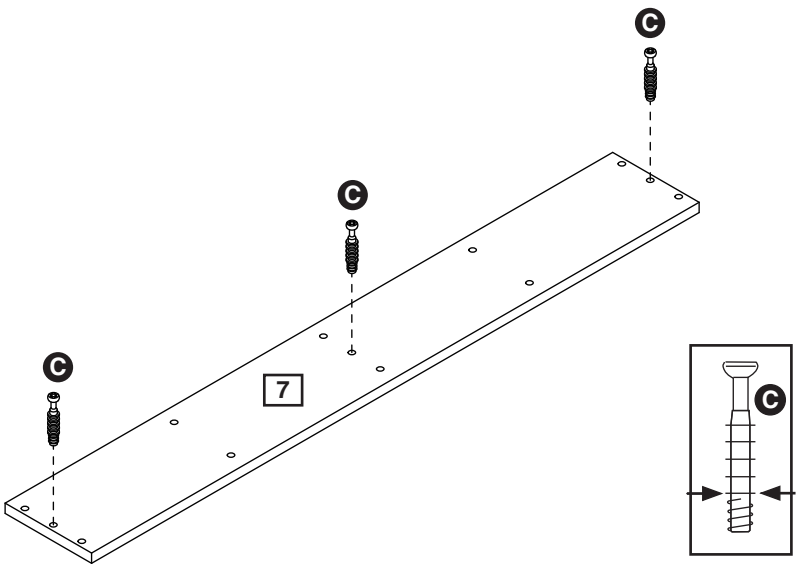


Assembly Instructions

Step 1


f: Place a small amount of Glue Ⓖ into the dowel holes and onto the joints' surfaces. Use dowels Ⓐ to fix Side Panel 7 onto the unit.


f:

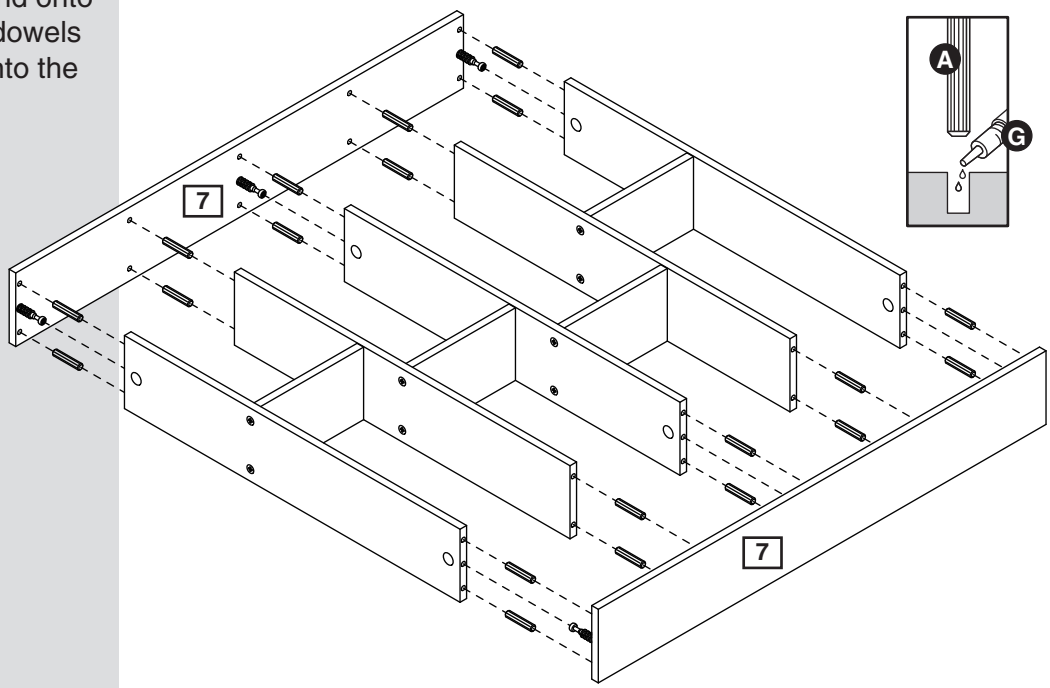

g: Use Locking Nuts Ⓓ to fix the Top, Bottom and Centre Panel onto the unit.

g:

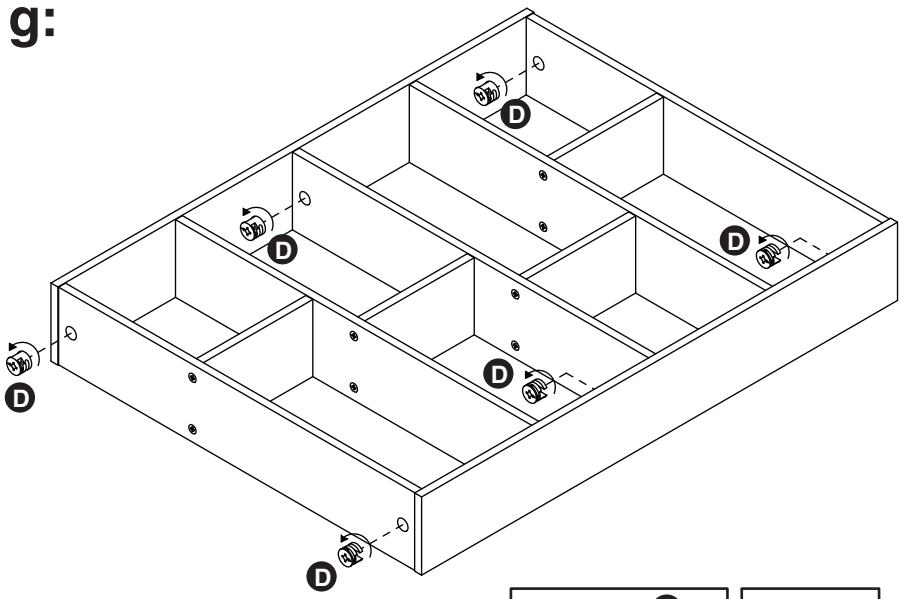

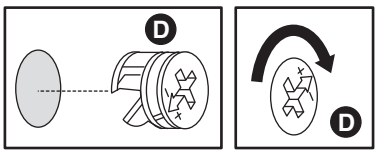

Assembly Instructions


Step 2

Fitting the Back Panel

a: Use Nails Ⓕ to fix the Back Panel 6 onto the unit.

NOTE: Use Nail Guide Ⓔ to keep a constant distance from the edge to Nails Ⓕ.

a:

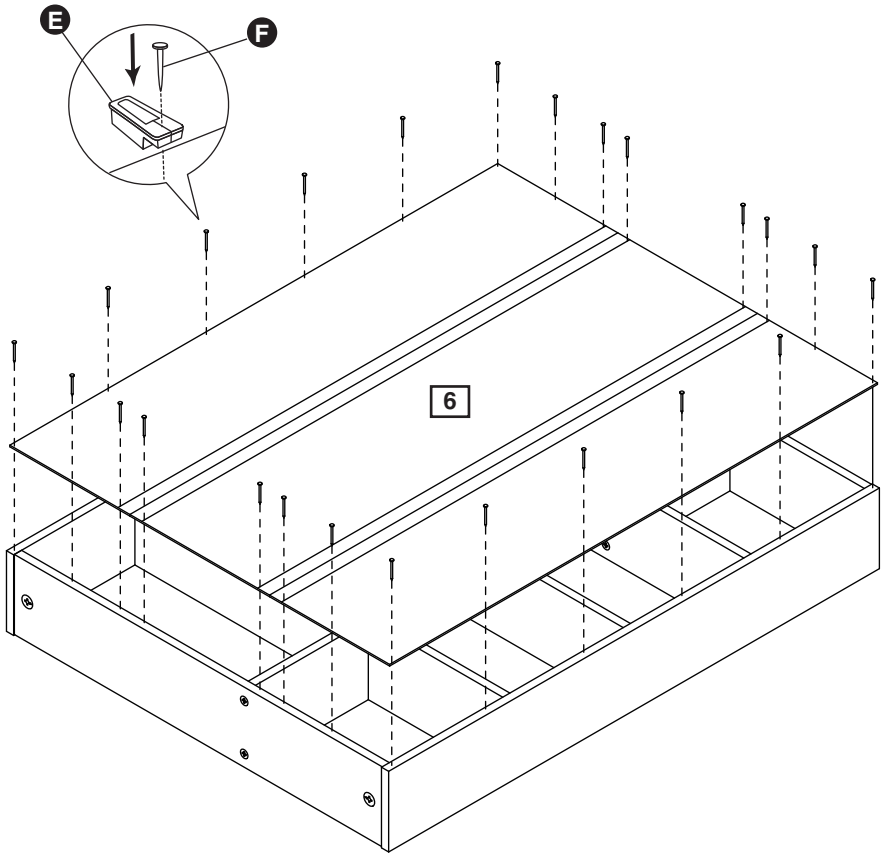

Assembly Instructions

Step 3

Finishing the Unit


It is strongly recommended that the unit is attached to the wall using Wall Strap J.


a: With help, place the unit in the instended position.

b: Use Screws H to fix the Wall Straps J onto the top of the unit.

c: Drill two holes at the desired height and insert Wall Plugs into the holes. Pass Screws through loose end of Wall Straps J to fix fix the unit to the wall.

The assembly is now complete.

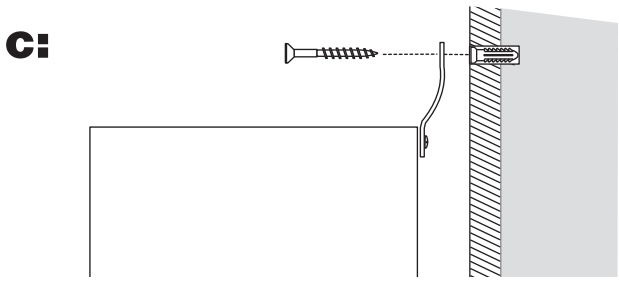


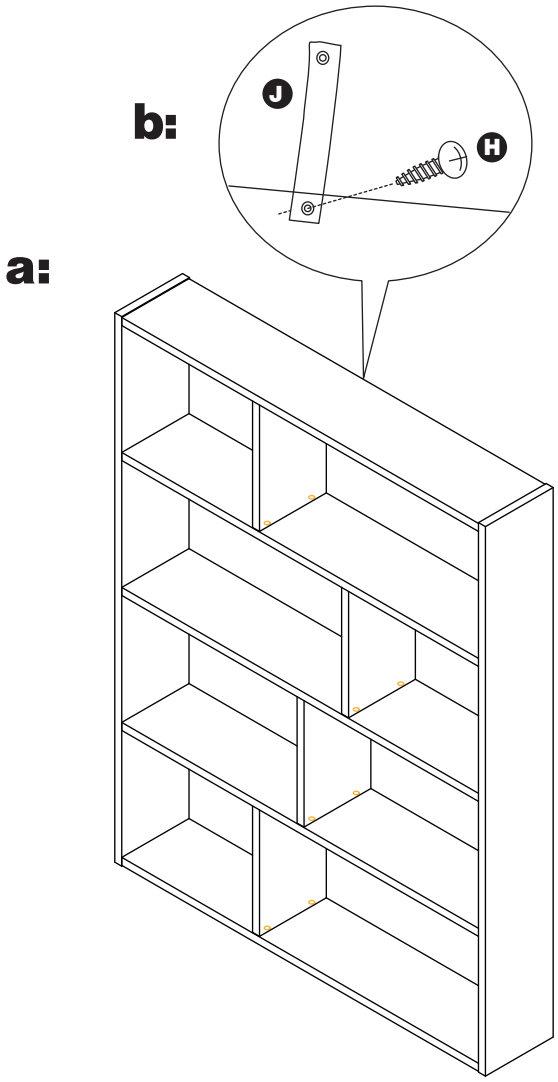

If you need help or have damaged or missing parts, call the
Customer Helpline: 08456 400800

A Guide to

Wall Mounting & Fixings

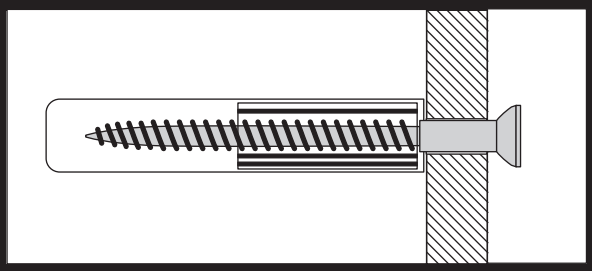

IMPORTANT:
When drilling into walls always check that there are no hidden wires or pipes etc. Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


HINTS:

1) General Rule ⚠ Always use a larger screw and wall plug if you are not sure.
2) Ensure you use the recommended drill bit to match the wall plug and hole size.
3) Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
4) Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure the plug is fitting below the ceramic tile to avoid splitting or cracking.
5) Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types Of Walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone, wood or plaster board.

No.1 "Standard" Wall Plug
General Wall Materials

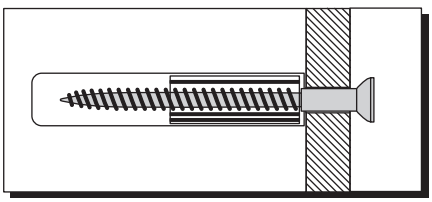


These come in various sizes and are made from plastic or sometimes wood fiber.

No.2 "General Purpose" Wall Plug
Aerated / Breeze Block

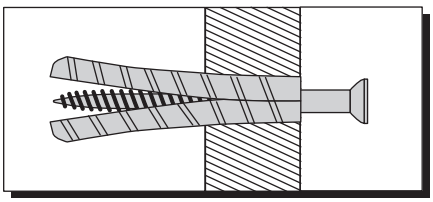


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case.
For light loads, a General Purpose Plug can be used.

No.3 "Shield Anchor" Wall Plug
Heavy Loads

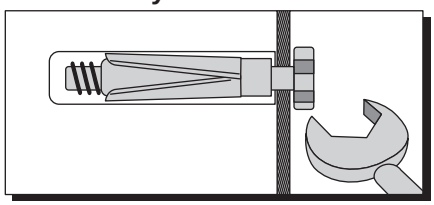


For use with heavier loads such as TV & HiFi Speakers and Satellite Dishes etc.

No.4 "Cavity Fixing" Wall Plug

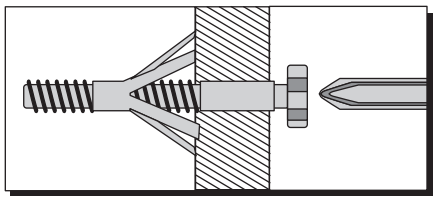


For use with plaster board partitions or hollow wooden doors.

No.5 "Cavity Fixing - Heavy Duty" Wall Plug

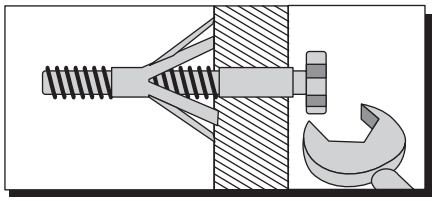

For use when fitting or supporting heavy loads such as shelving, wall cabinets, coat racks.

No.6 "Hammer Fixing" Wall Plug

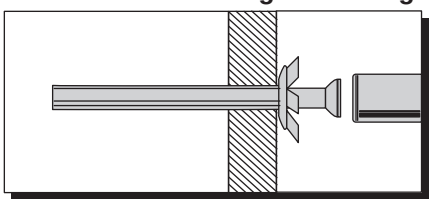

For use with walls stuck with plaster board. The hammer fixing allows it to be fixed to the wall rather than the plaster board. Always check the fixing is secure to the retaining wall.

CARE & MAINTENANCE

⚠ **SAFETY**
Always check the fitting and location to ensure your safety in and around the home.

⚠ **FITTING**
From time to time check the fitting to ensure the wall plugs or screws do not become loose.