


Islington - Media Unit

Assembly Instructions - Please keep for future reference

932/6950

932/6943

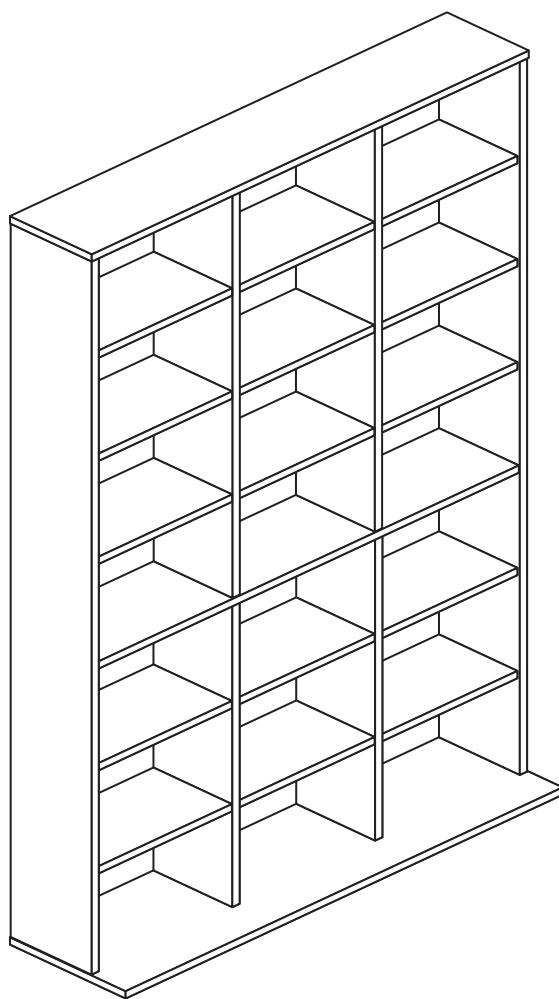

Dimensions

Width - 90.5cm

Depth - 24cm

Height - 150.5cm



**MADE IN
BRITAIN**

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 28kgs. Please lift with care.

- Check you have all the components and tools listed on pages 2 and 3.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.

- **Safety note:** It is recommended that this unit is secured to a wall using the bracket supplied.

- Dispose of all packaging carefully and responsibly.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.


- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

Components - Panels

If you have damaged or missing components, call the
Customer Helpline: 08456 400800 quoting the reference
numbers below


Please check you have all the panels listed below




1 Left Side (D0825A)
(1475 x 167mm)



2 Right Side (D0826A)
(1475 x 167mm)




3 Top (D0827A)
(903 x 169mm)

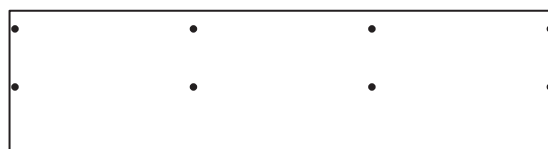


4 Base (D0828A)
(903 x 239mm)



5 Middle Shelf (D0829A)
(870 x 165mm)



6 Top Upright (D0830A)
(836 x 163mm) x 2



7 Bottom Upright (D0831A)
(624 x 163mm) x 2



8 Shelf (D0832A)
(280 x 162mm) x 15



9 Back (X802)
(1500 x 294mm) x 3












Components - Fittings


If you have damaged or missing components, call the
Customer Helpline: 08456 400800 quoting the reference
numbers below

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  Wooden dowel (F40) x 24	B  Wooden dowel (F22) x 28	C  Metal dowel (F901) x 6
D  Large locking nut (F900) x 6	E  50mm Screw (F49) x 8	F  Allen Key (F36) x 1
G  Nail (F51) x 32	H  15mm Screw (F284) x 13	I  Bracket (F327) x 1

Tools required



Rule



Cross-head
screwdriver



Scissors



Hammer




Eye protection
(when using a
hammer or drill)



Electric drill
(only use when
drilling into walls)

Ruler - Use this ruler to help correctly identify the screws



Assembly Instructions


If you have damaged or missing components, call the
Customer Helpline: 08456 400800 quoting the reference
numbers below

Step 1

Prepare the 2 top uprights

Tap 2 short wooden
dowels **B** into each of
the top uprights **6** as
shown.

Note: The short wooden
dowels **must not** stick
out from the edge by
more than 10mm or they
may damage other
panels.

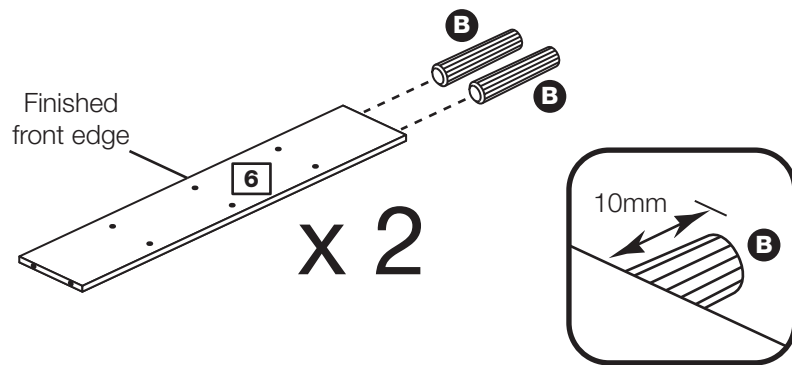


Step 2

Join 3 shelves to a top upright

Position 3 shelves **8**
against a top upright **6**
as shown.

Tap 6 long wooden
dowels **A** through the
top upright **6** and into
each of the shelves **8**.

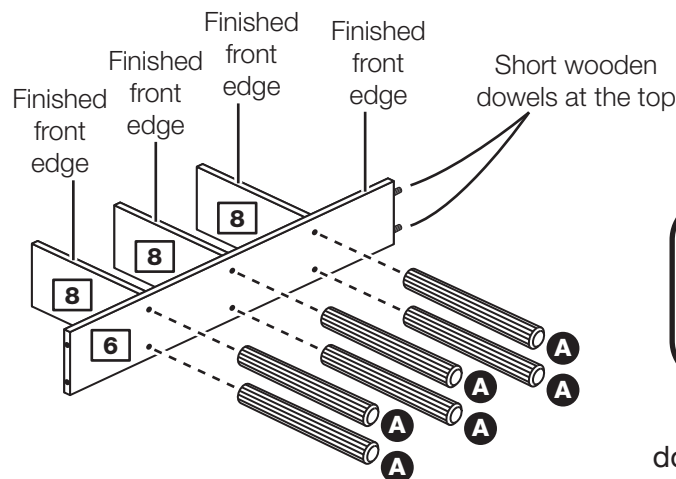


Gently tap the large
dowels through the top
upright and into the shelf
until they 'bottom out'.

Step 3

Fit the other top upright

Fit the other top upright
6 to the assembly.

Tap 6 long wooden
dowels **A** through the
top upright **6** and into
each of the shelves **8**.

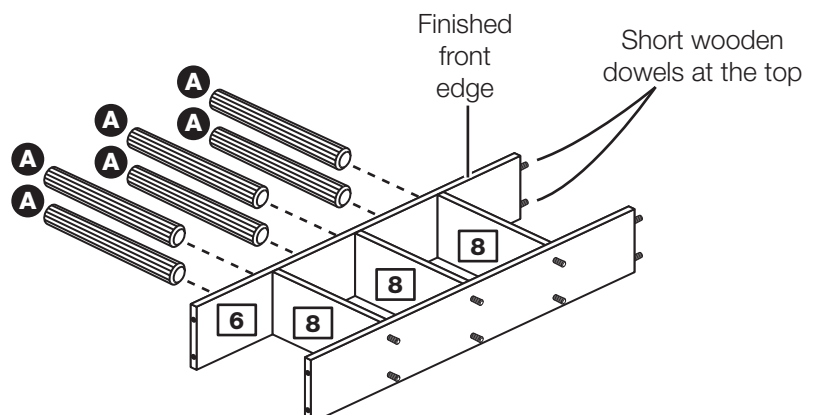


Assembly Instructions

Step 4

Prepare the middle shelf

Insert 4 large locking nuts **D** into the middle shelf **5** as shown.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

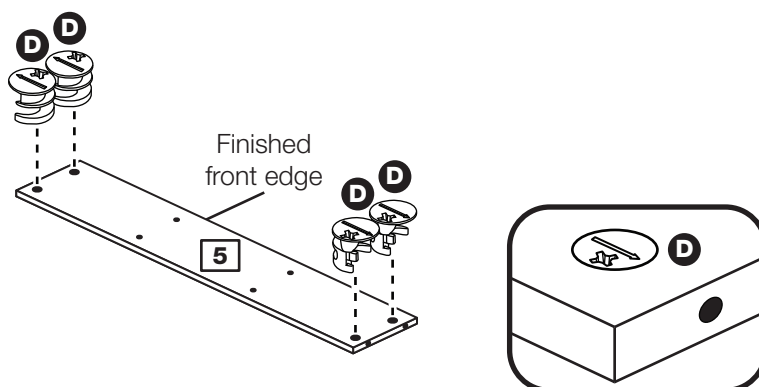


Step 5

Fit the middle shelf

Position the middle shelf **5** onto the assembly as shown.

Tap 4 long wooden dowels **A** through the middle shelf **5** and into the bottom of the 2 top uprights **6**.

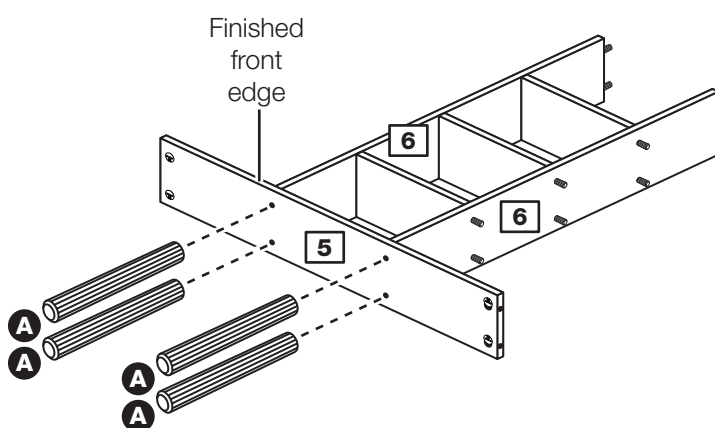


Step 6

Join 2 shelves to a bottom upright

Position 2 shelves **8** against a bottom upright **7**.

Tap 4 long wooden dowels **A** through the bottom upright **7** and into each of the shelves **8**.

Note: Make sure that the bottom uprights are the right way around. The 8mm holes are in the top edge and the 5.5mm holes are in the bottom edge.

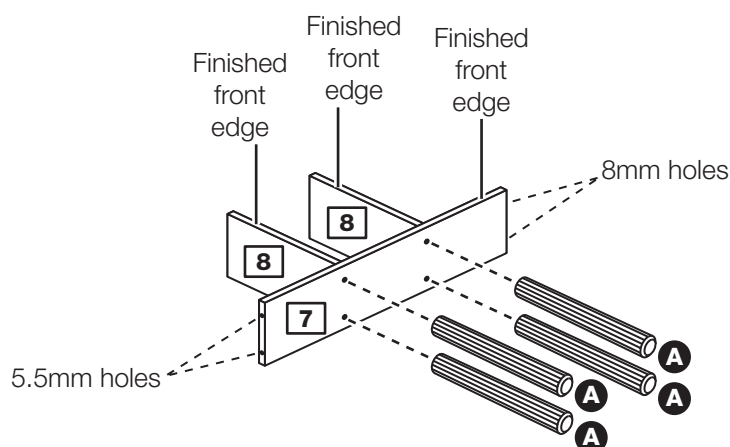


Assembly Instructions

Step 7

Fit the other bottom upright

Fit the other bottom upright **7** to the assembly.


Tap 4 long wooden dowels **A** through the bottom upright **7** and into each of the shelves **8**.

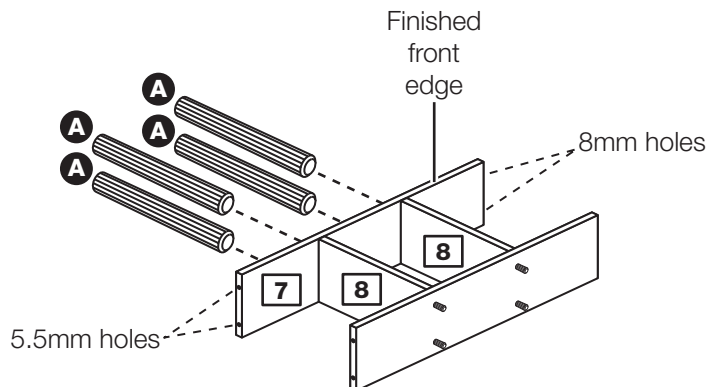

Step 8

Fit the bottom upright assembly


Push the 2 bottom uprights **7** onto the middle shelf **5**.

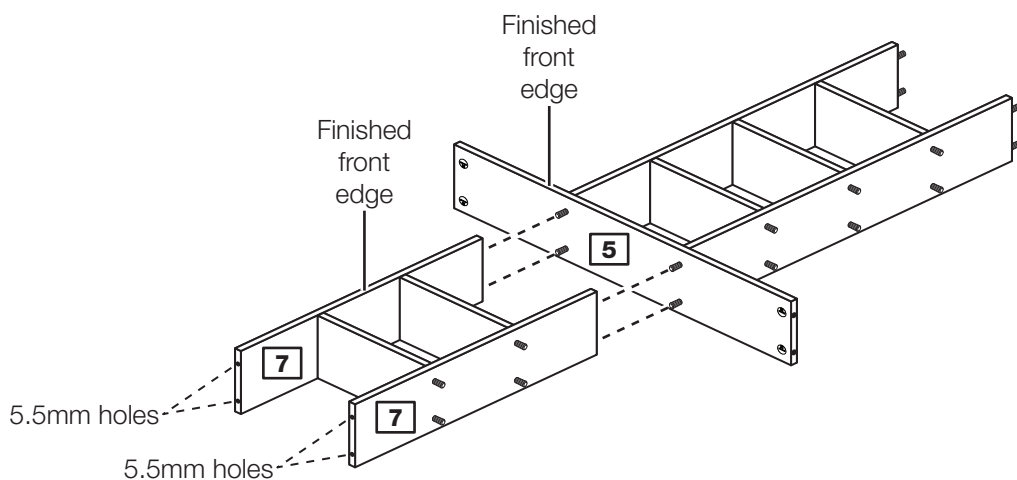

Step 9

Prepare the remaining shelves

Tap 2 short wooden dowels **B** into each of the remaining shelves **8** as shown.

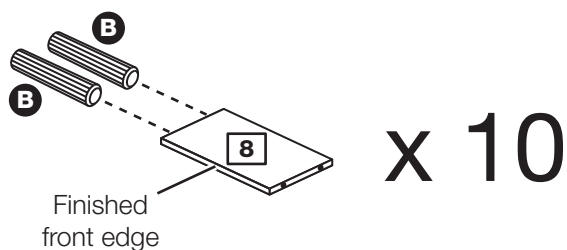


Assembly Instructions

Step 10

Fit the shelves

Push the shelves **8** onto the top uprights **6** and bottom uprights **7** as shown.

Note: Make sure that all of the shelves have the finished front edge pointing upwards.

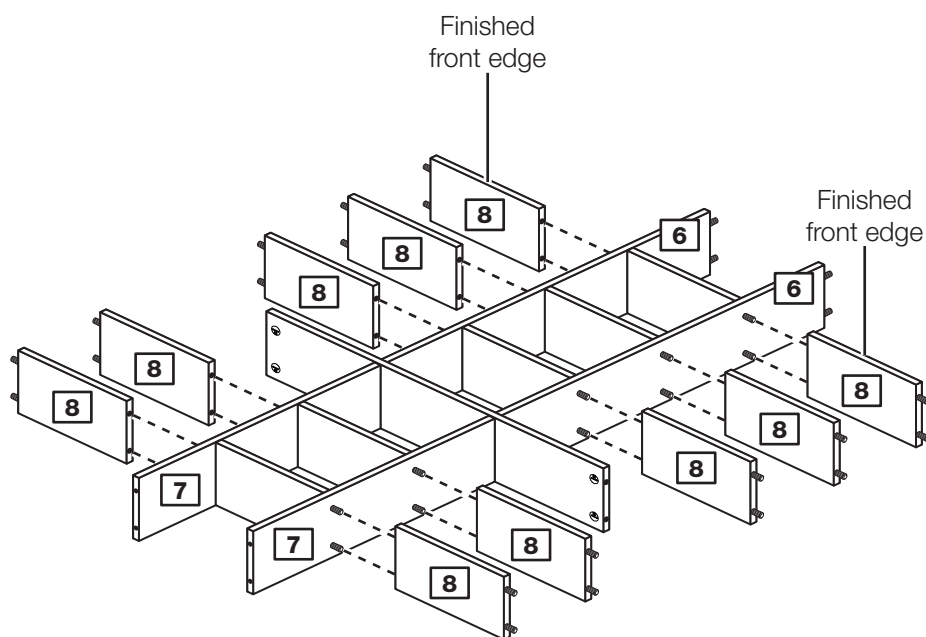

Step 11


Prepare the left side

Screw 2 metal dowels **C** into the left side **1**.

Note: Tighten metal dowels up fully against the panels.

Tap 2 short wooden dowels **B** into the left side **1** as shown.

Insert a large locking nut **D** into the left side **1**.

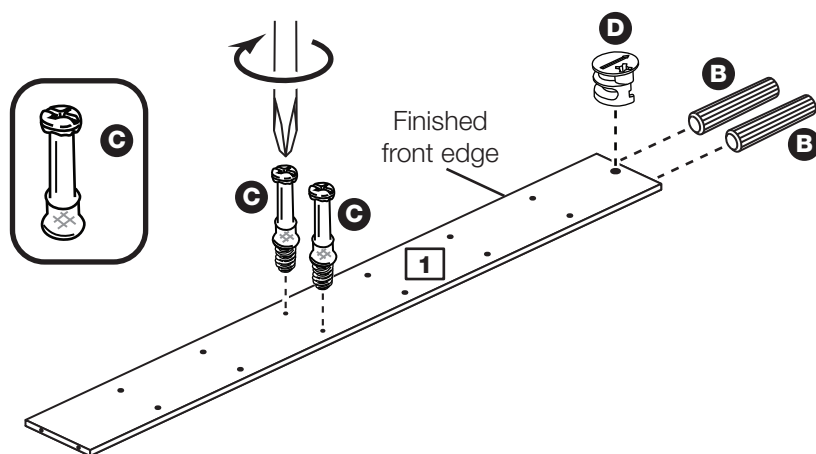

Assembly Instructions



Step 12

Fit the left side

Push the left side **1** onto the assembly.

Use a screwdriver to tighten the 2 large locking nuts **D** fitted to the middle shelf **5**.

Note: Turn the large locking nuts **D** as far as they will go - more than 1/2 a turn.

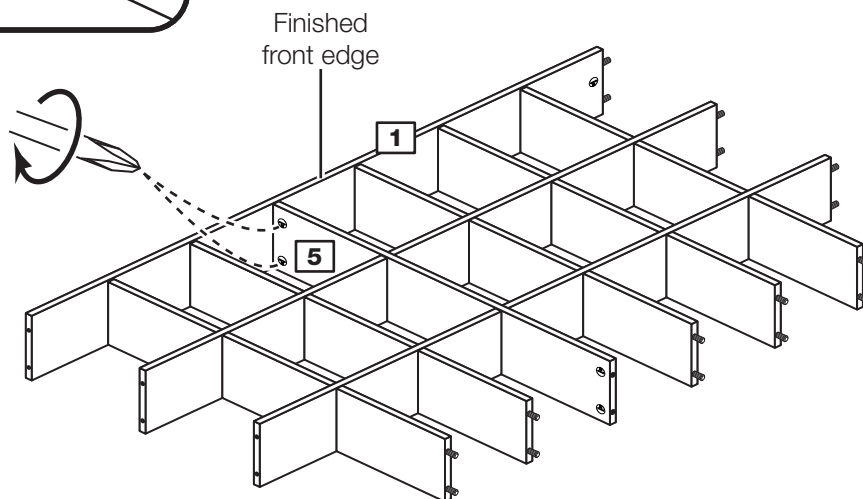


Step 13

Prepare the right side

Screw 2 metal dowels **C** into the right side **2**.

Tap 2 short wooden dowels **B** into the right side **2** as shown.

Insert a large locking nut **D** into the right side **2**.

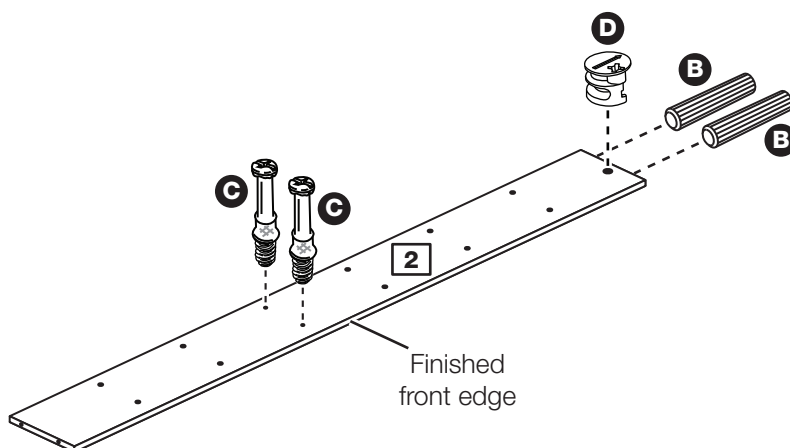


Assembly Instructions

Step 14

Fit the right side

Push the right side **2** onto the assembly.


Use a screwdriver to tighten the 2 large locking nuts **D** fitted to the middle shelf **5**.

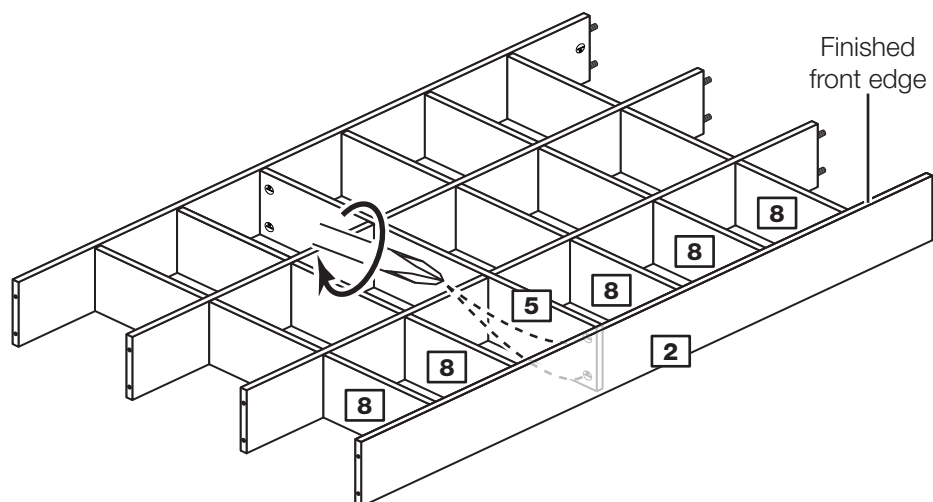

Step 15

Fit the base

Fit the base **4** to the assembly with 8 screws **E** and tighten them using the allen key **F**.

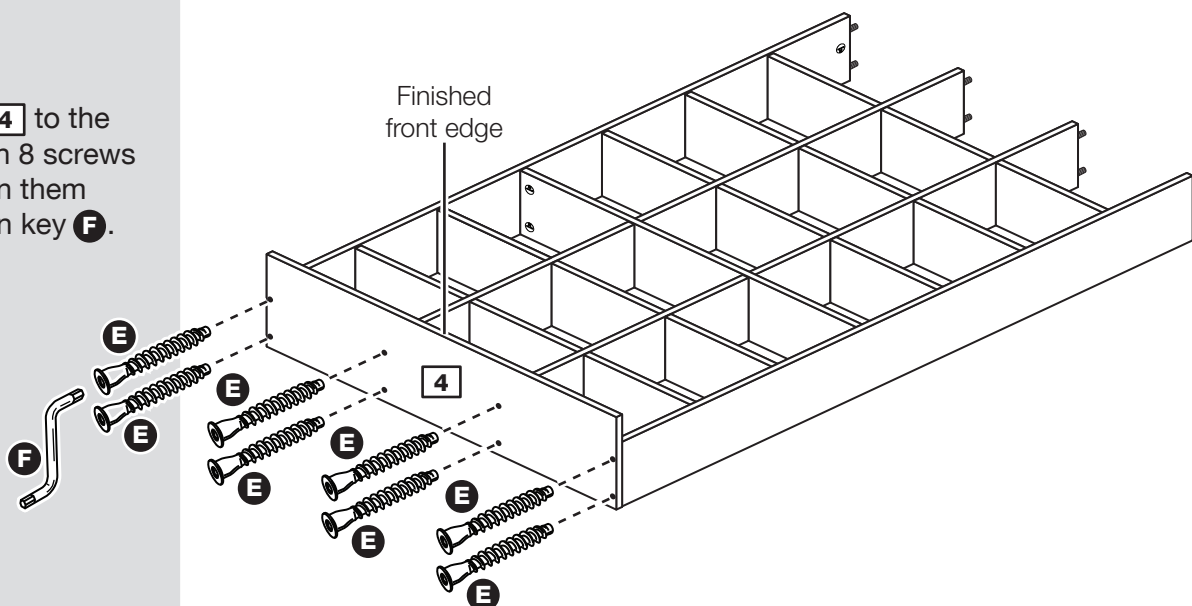


Step 16

Prepare the top

Screw 2 metal dowels **C** into the top **3**.

Fix the bracket **I** in the middle of the top **3**, flush to the back edge, using screw **H**.

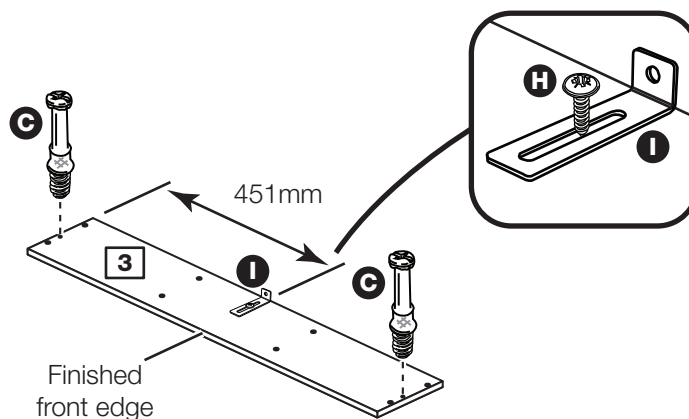

Assembly Instructions


Step 17

Fit the top

Push the top **3** onto the assembly.

Use a screwdriver to tighten the 2 large locking nuts **D** fitted at the top of the left side **1** and right side **2**.

Turn the assembly over for the next step.

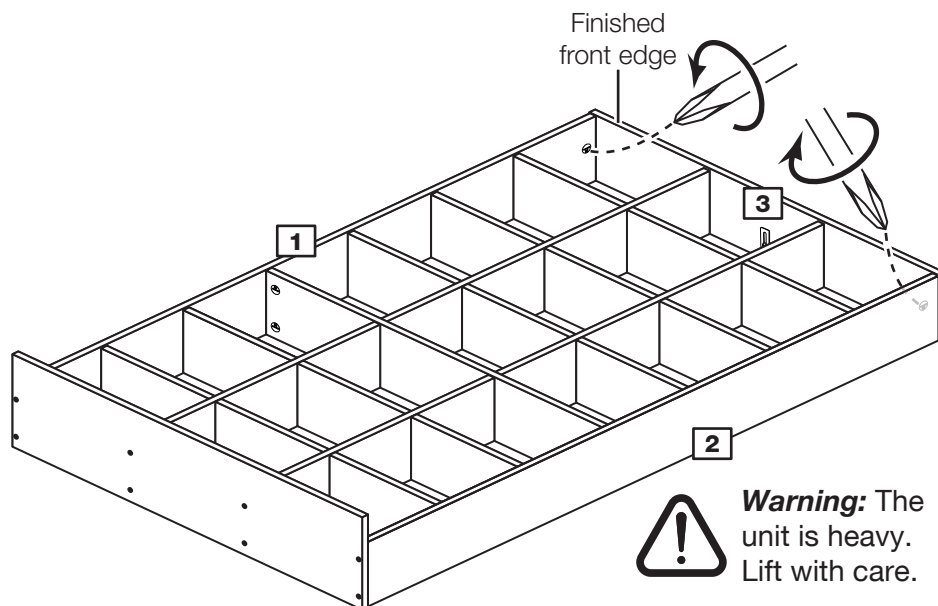

Step 18

Fit the backs

a: Square up the unit by making sure that measurement **x:x** equals **y:y**.

b: Place the 3 backs **9** down onto the unit as shown.

Make sure that the 3 backs **9** are pushed up tight against each other and that they meet in the centre of the upright panels' back edge.


Only nail **G** around the outside edges of the 3 backs **9**.

c: Using 12 screws **H**, screw down between the 3 backs **9** and into the upright panels' back edge.

Stand the unit up for the next step.

a: The measurement from top corner **X** to bottom corner **X** must be equal to the measurement from top corner **Y** to bottom corner **Y**

b: **Note:** Do not nail where the backs meet. Nails should be spaced about 150mm apart.

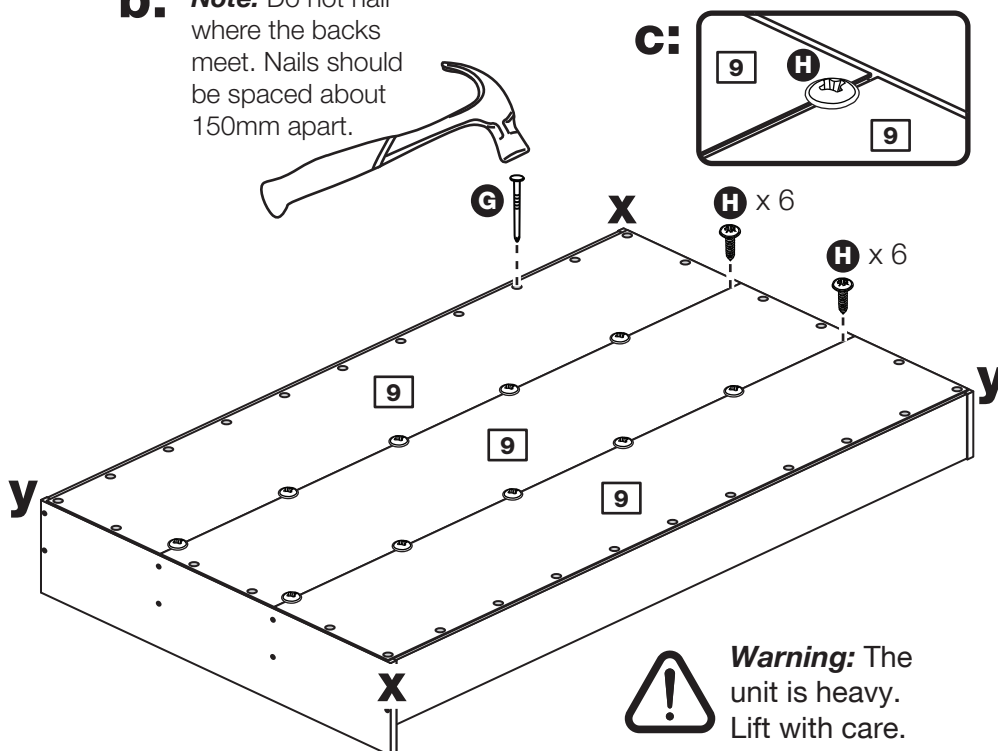

Assembly Instructions

Step 19

Secure unit to a wall

To prevent possible overbalancing we recommend that this unit is secured to a suitable wall by use of the metal bracket **1** fitted under the top **3** of the unit.

Fixings are not supplied as they will need to suit the wall type, and the length of screw will depend on the distance of the back of the unit to the wall.




Warning: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

Assembly is complete



Warning: The unit is heavy. Lift with care.

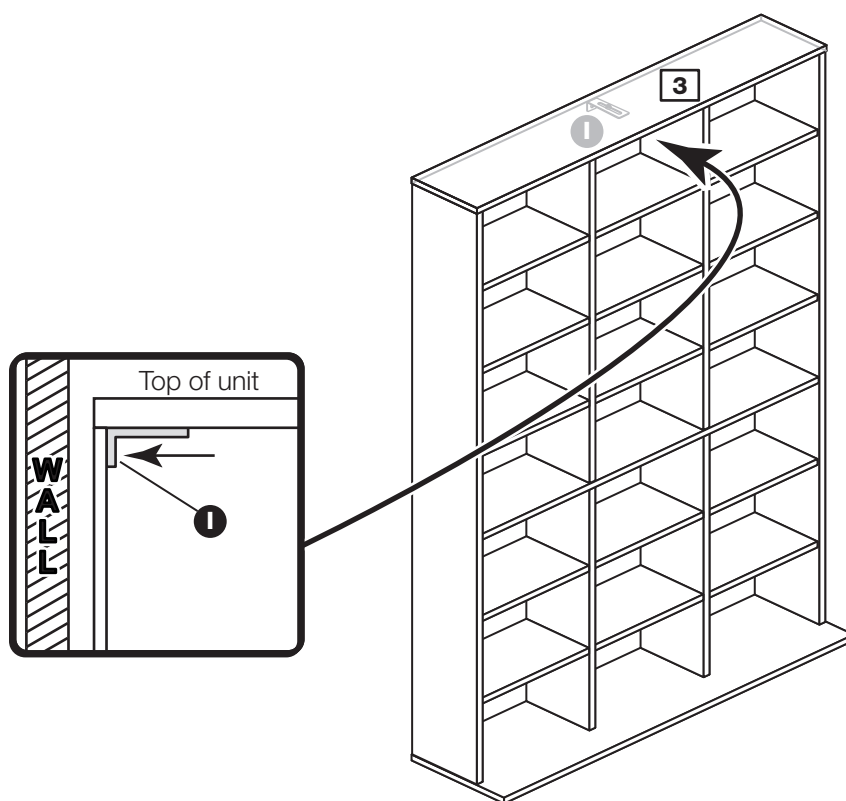

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800 and quote the reference numbers on the component pages.


Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

Islington - Media Unit

Assembly Instructions - Please keep for future reference

932/6950

932/6943

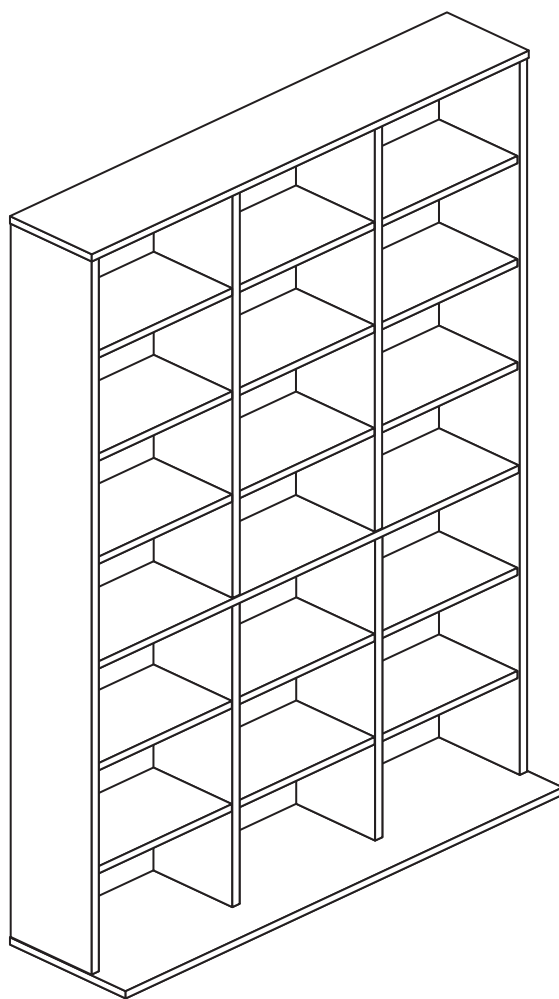

Dimensions

Width - 90.5cm

Depth - 24cm

Height - 150.5cm



**MADE IN
BRITAIN**

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800**



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 28kgs. Please lift with care.

- Check you have all the components and tools listed on pages 2 and 3.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**,

as this could damage the unit.

Only use hand screwdrivers.

- **Safety note:** It is recommended that this unit is secured to a wall using the overbalance protector kit supplied or, an alternative fixing method of your choice.

- Dispose of all packaging carefully and responsibly.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.


- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you have damaged or missing components, call the
Customer Helpline: 03456 400800 quoting the reference
numbers below

Please check you have all the panels listed below




1 Left Side (D0825A)
(1475 x 167mm)



2 Right Side (D0826A)
(1475 x 167mm)




3 Top (D0827A)
(903 x 169mm)

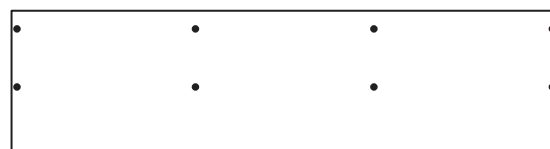


4 Base (D0828A)
(903 x 239mm)



5 Middle Shelf (D0829A)
(870 x 165mm)



6 Top Upright (D0830A)
(836 x 163mm) x 2




7 Bottom Upright (D0831A)
(624 x 163mm) x 2



8 Shelf (D0832A)
(280 x 162mm) x 15



9 Middle Back (X802)
(1500 x 294mm)



10 Back (X1500-300)
(1500 x 300mm) x 2








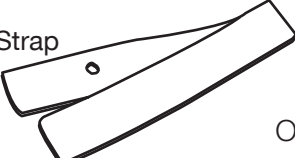




Components - Fittings


If you have damaged or missing components, call the
Customer Helpline: 03456 400800 quoting the reference
numbers below

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  Wooden dowel (F40) x 24	B  Wooden dowel (F22) x 28	C  Metal dowel (F901) x 6
D  Large locking nut (F900) x 6	E  50mm Screw (F49) x 8	F  Allen Key (F36) x 1
G  Nail (F51) x 32	H    Strap Screw Washer x 2 Overbalance protector kit (F269) x 1	

Tools required



Rule



Cross-head
screwdriver



Scissors



Hammer




Eye protection
(when using a
hammer or drill)



Electric drill
(only use when
drilling into walls)

Ruler - Use this ruler to help correctly identify the screws



Assembly Instructions


If you have damaged or missing components, call the
Customer Helpline: 03456 400800 quoting the reference
numbers below

Step 1

Prepare the 2 top uprights

Tap 2 short wooden
dowels **B** into each of
the top uprights **6** as
shown.

Note: The short wooden
dowels **must not** stick
out from the edge by
more than 10mm or they
may damage other
panels.

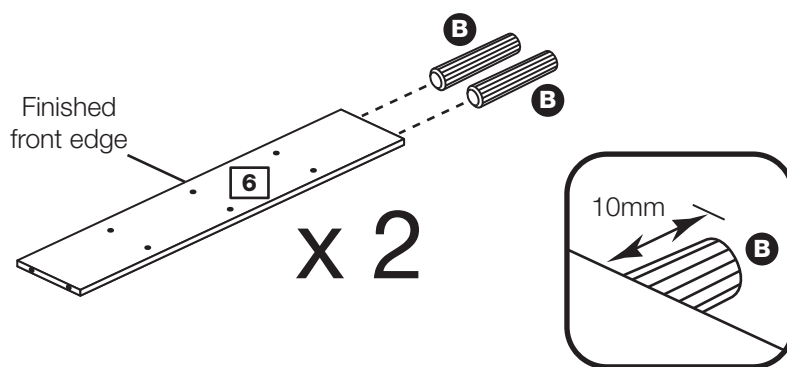


Step 2

Join 3 shelves to a top upright

Position 3 shelves **8**
against a top upright **6**
as shown.

Tap 6 long wooden
dowels **A** through the
top upright **6** and into
each of the shelves **8**.

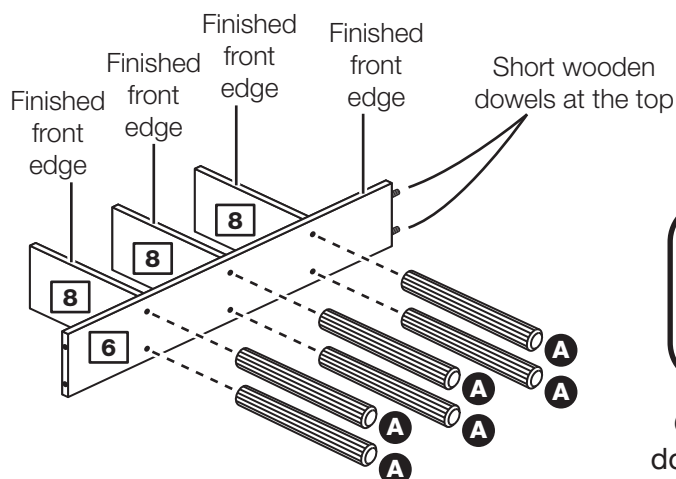


Gently tap the large
dowels through the top
upright and into the shelf
until they 'bottom out'.

Step 3

Fit the other top upright

Fit the other top upright
6 to the assembly.

Tap 6 long wooden
dowels **A** through the
top upright **6** and into
each of the shelves **8**.

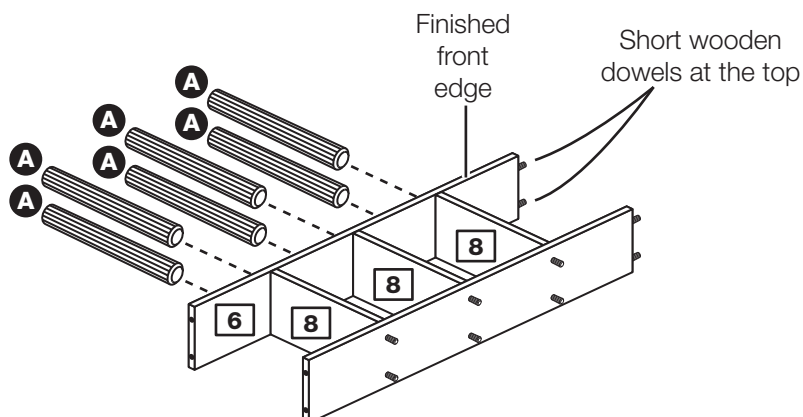


Assembly Instructions

Step 4

Prepare the middle shelf

Insert 4 large locking nuts **D** into the middle shelf **5** as shown.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

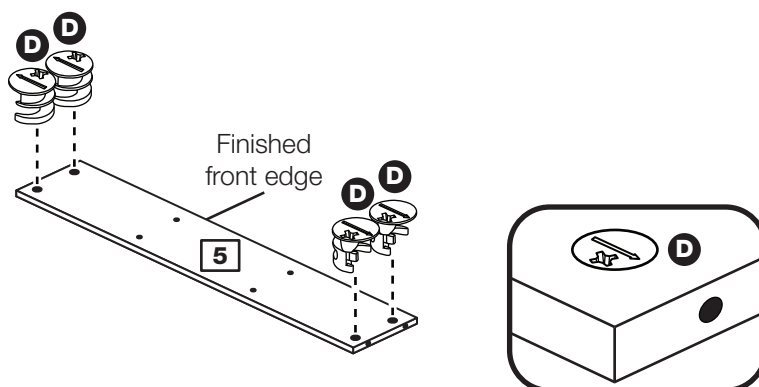


Step 5

Fit the middle shelf

Position the middle shelf **5** onto the assembly as shown.

Tap 4 long wooden dowels **A** through the middle shelf **5** and into the bottom of the 2 top uprights **6**.

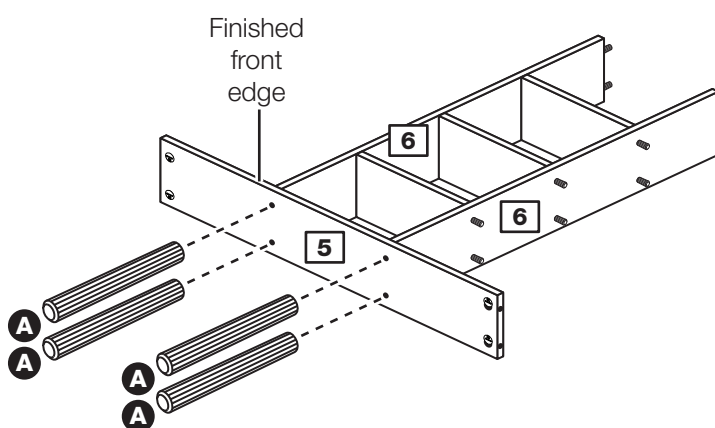


Step 6

Join 2 shelves to a bottom upright

Position 2 shelves **8** against a bottom upright **7**.

Tap 4 long wooden dowels **A** through the bottom upright **7** and into each of the shelves **8**.

Note: Make sure that the bottom uprights are the right way around. The 8mm holes are in the top edge and the 5.5mm holes are in the bottom edge.

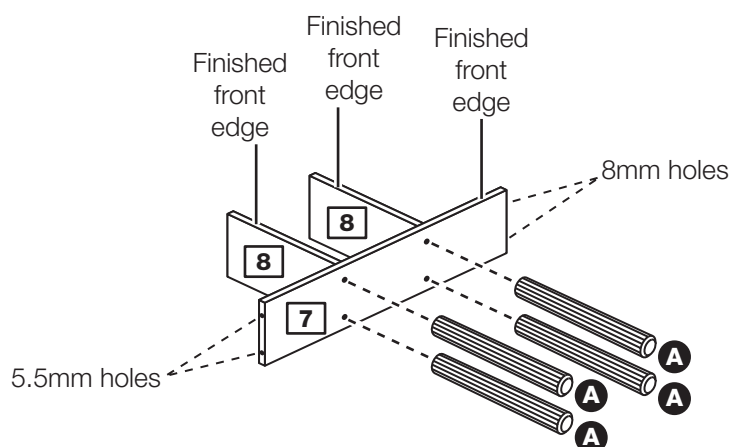


Assembly Instructions

Step 7

Fit the other bottom upright

Fit the other bottom upright **7** to the assembly.


Tap 4 long wooden dowels **A** through the bottom upright **7** and into each of the shelves **8**.

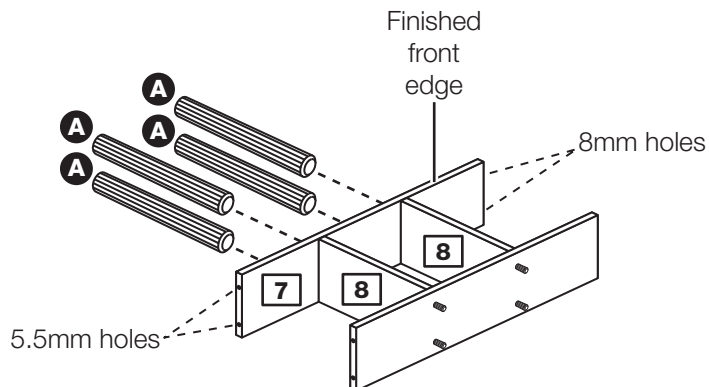

Step 8

Fit the bottom upright assembly


Push the 2 bottom uprights **7** onto the middle shelf **5**.

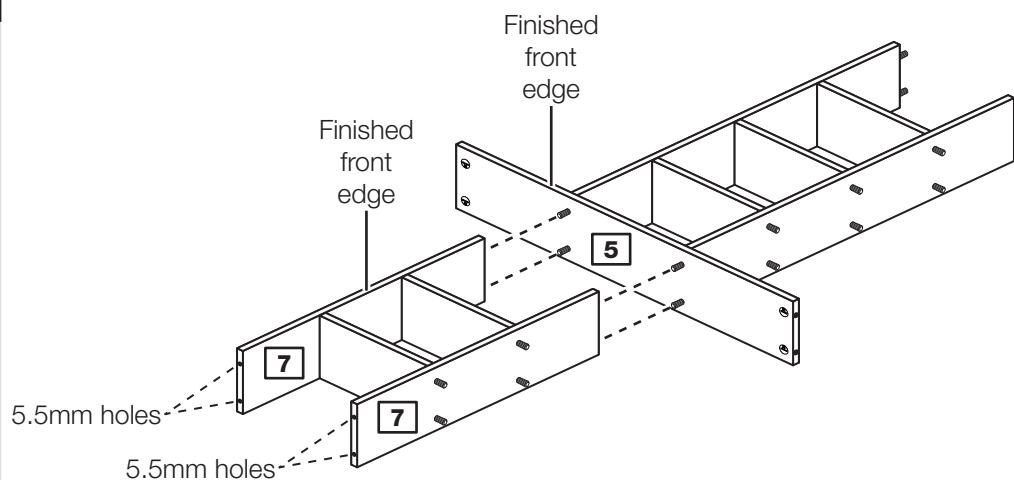

Step 9

Prepare the remaining shelves

Tap 2 short wooden dowels **B** into each of the remaining shelves **8** as shown.

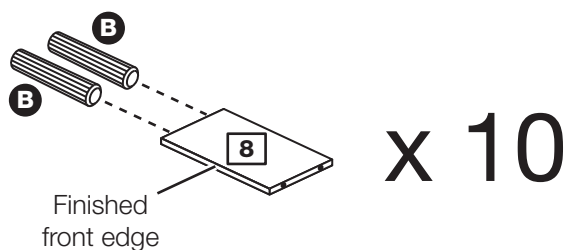


Assembly Instructions

Step 10

Fit the shelves

Push the shelves **8** onto the top uprights **6** and bottom uprights **7** as shown.

Note: Make sure that all of the shelves have the finished front edge pointing upwards.

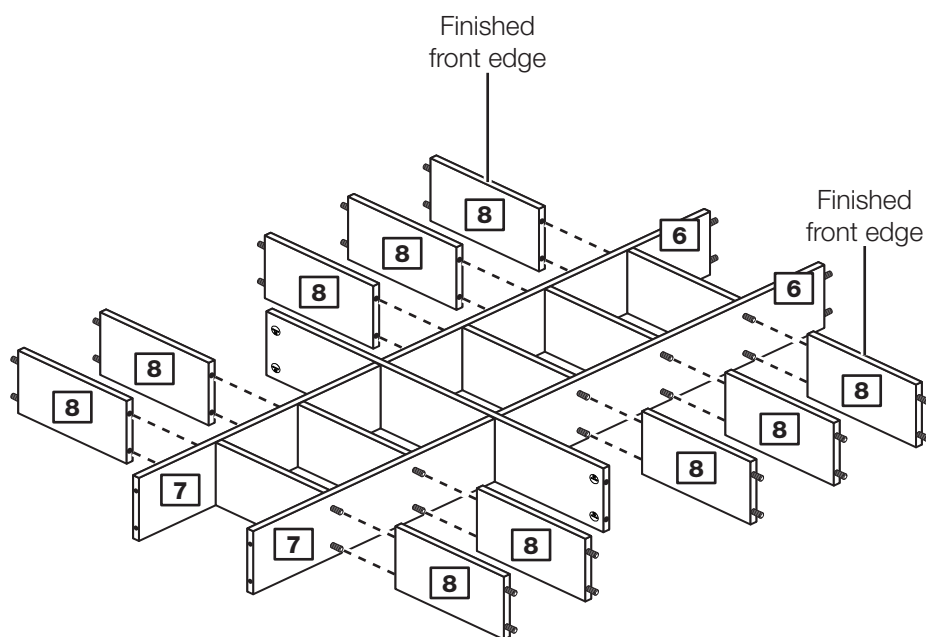

Step 11


Prepare the left side

Screw 2 metal dowels **C** into the left side **1**.

Note: Tighten metal dowels up fully against the panels.

Tap 2 short wooden dowels **B** into the left side **1** as shown.

Insert a large locking nut **D** into the left side **1**.

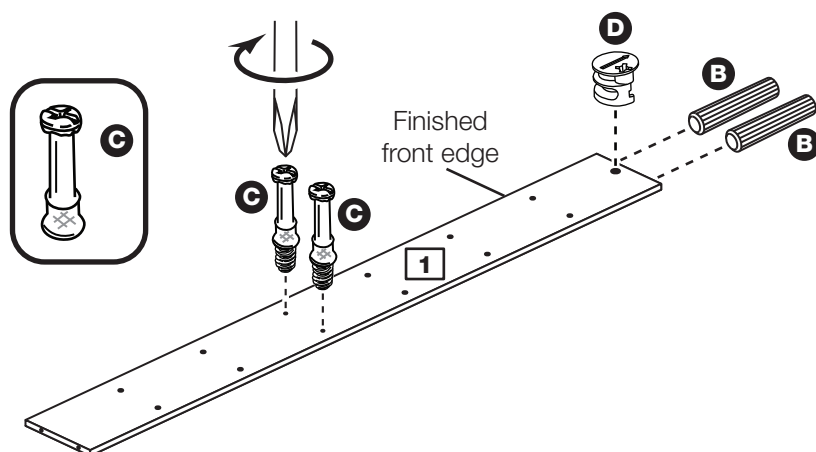

Assembly Instructions



Step 12

Fit the left side

Push the left side **1** onto the assembly.

Use a screwdriver to tighten the 2 large locking nuts **D** fitted to the middle shelf **5**.

Note: Turn the large locking nuts **D** as far as they will go - more than 1/2 a turn.

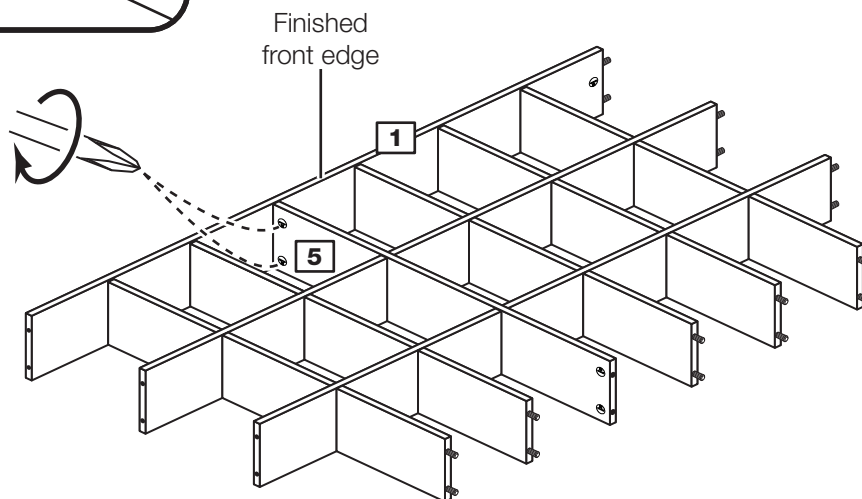


Step 13

Prepare the right side

Screw 2 metal dowels **C** into the right side **2**.

Tap 2 short wooden dowels **B** into the right side **2** as shown.

Insert a large locking nut **D** into the right side **2**.

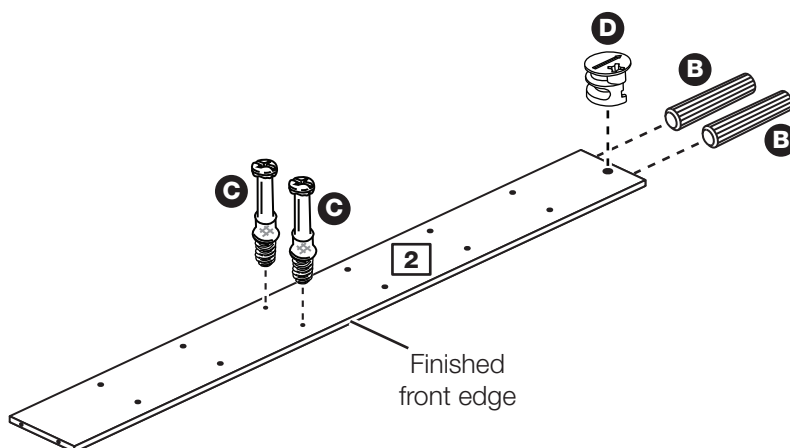


Assembly Instructions

Step 14

Fit the right side

Push the right side **2** onto the assembly.


Use a screwdriver to tighten the 2 large locking nuts **D** fitted to the middle shelf **5**.

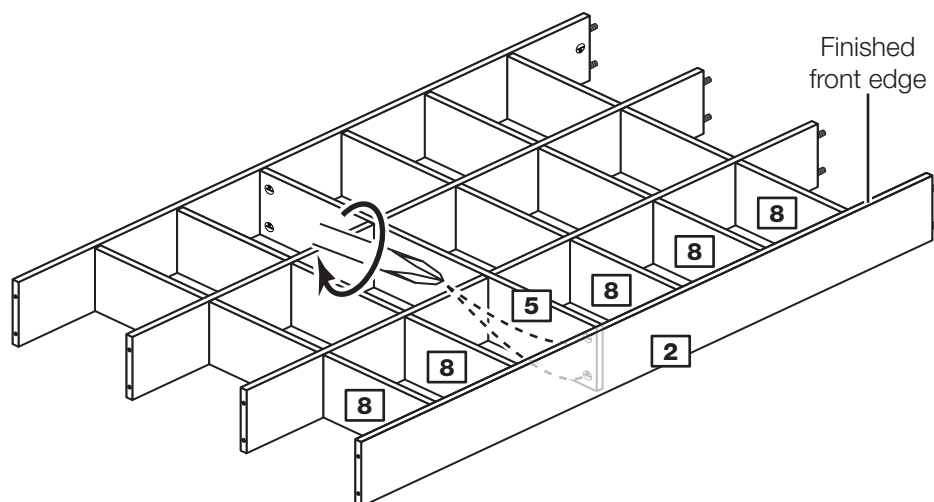

Step 15

Fit the base


Fit the base **4** to the assembly with 8 screws **E** and tighten them using the allen key **F**.

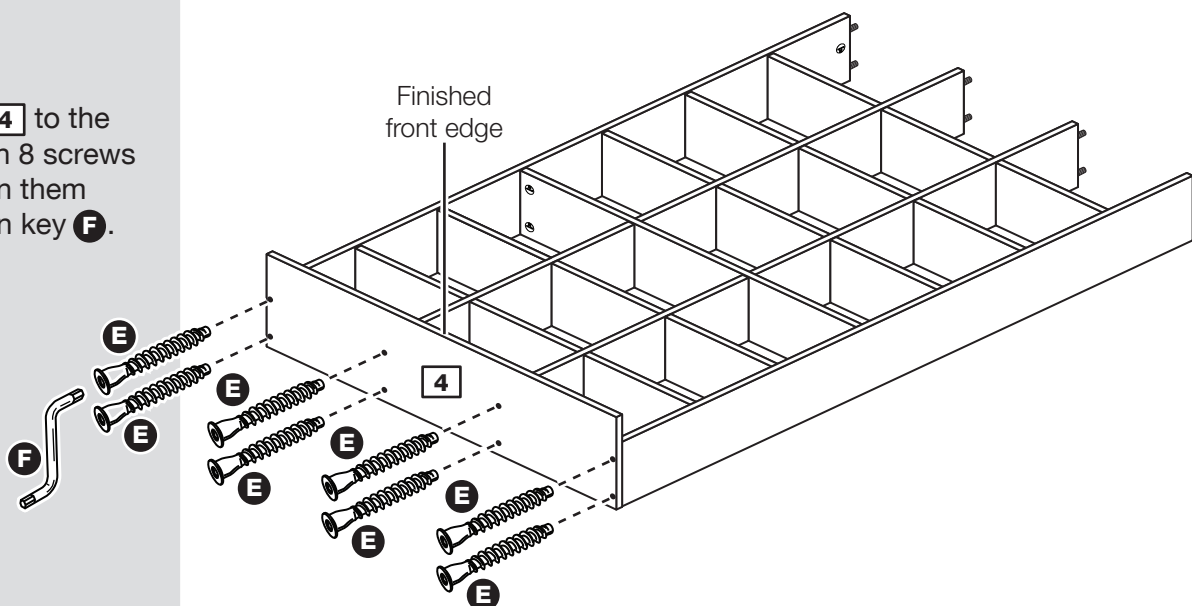

Step 16

Prepare the top

Screw 2 metal dowels **C** into the top **3**.

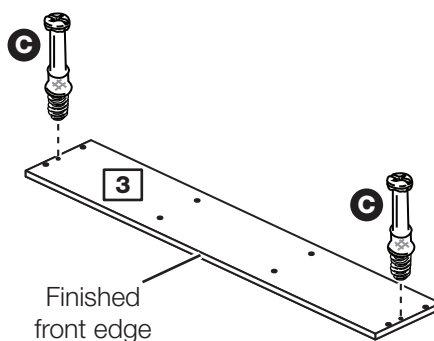

Assembly Instructions


Step 17

Fit the top

Push the top **3** onto the assembly.

Use a screwdriver to tighten the 2 large locking nuts **D** fitted at the top of the left side **1** and right side **2**.

Turn the assembly over for the next step.

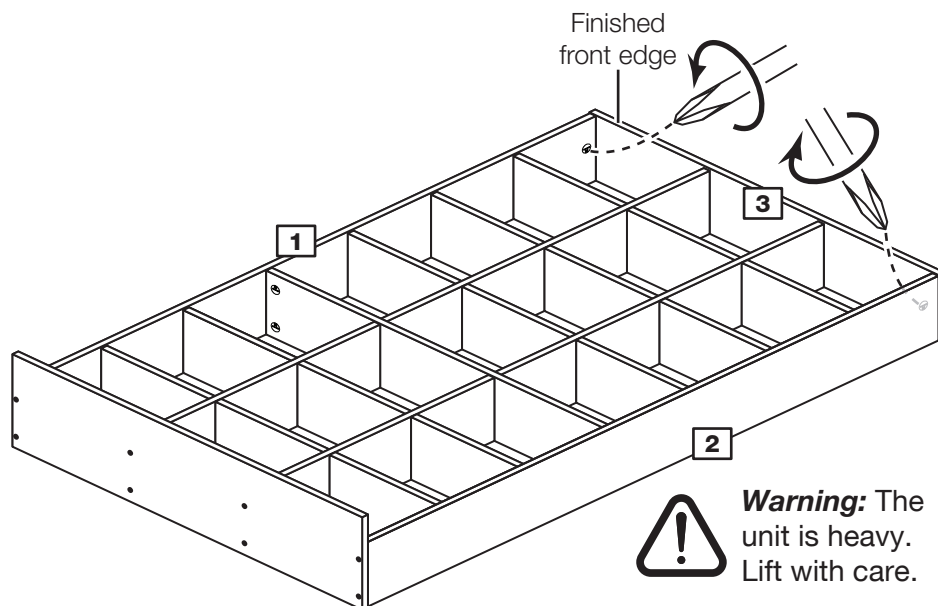

Step 18

Fit the backs

a: Square up the unit by making sure that measurement **x:x** equals **y:y**.

b: Place the 3 backs **9** and **10** down onto the unit as shown.

Make sure that the 3 backs **9** and **10** are pushed up tight against each other and that they meet in the centre of the upright panels' back edge.


Only nail **G** around the outside edges of the 3 backs **9** and **10**.

c: Using 12 screws **H**, screw down between the 3 backs **9** and **10** and into the upright panels' back edge.

Stand the unit up for the next step.

a: The measurement from top corner **X** to bottom corner **X** must be equal to the measurement from top corner **Y** to bottom corner **Y**

b: **Note:** Do not nail where the backs meet. Nails should be spaced about 150mm apart.

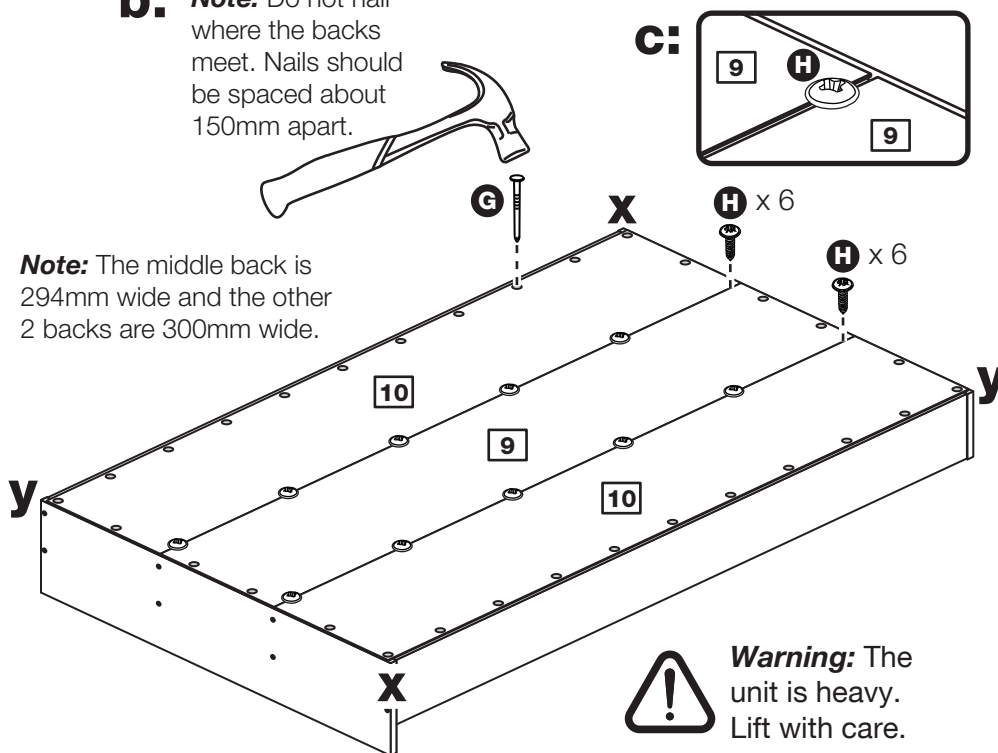

Assembly Instructions

Step 19


Fit the overbalance protector kit

To prevent possible overbalancing we recommend that this unit is secured to a suitable wall by fitting of the overbalance protector kit **H** to the unit, or an alternative fixing method of your choice.

Wall fixings are not supplied as they will need to suit the wall type.

Note: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

Assembly is complete

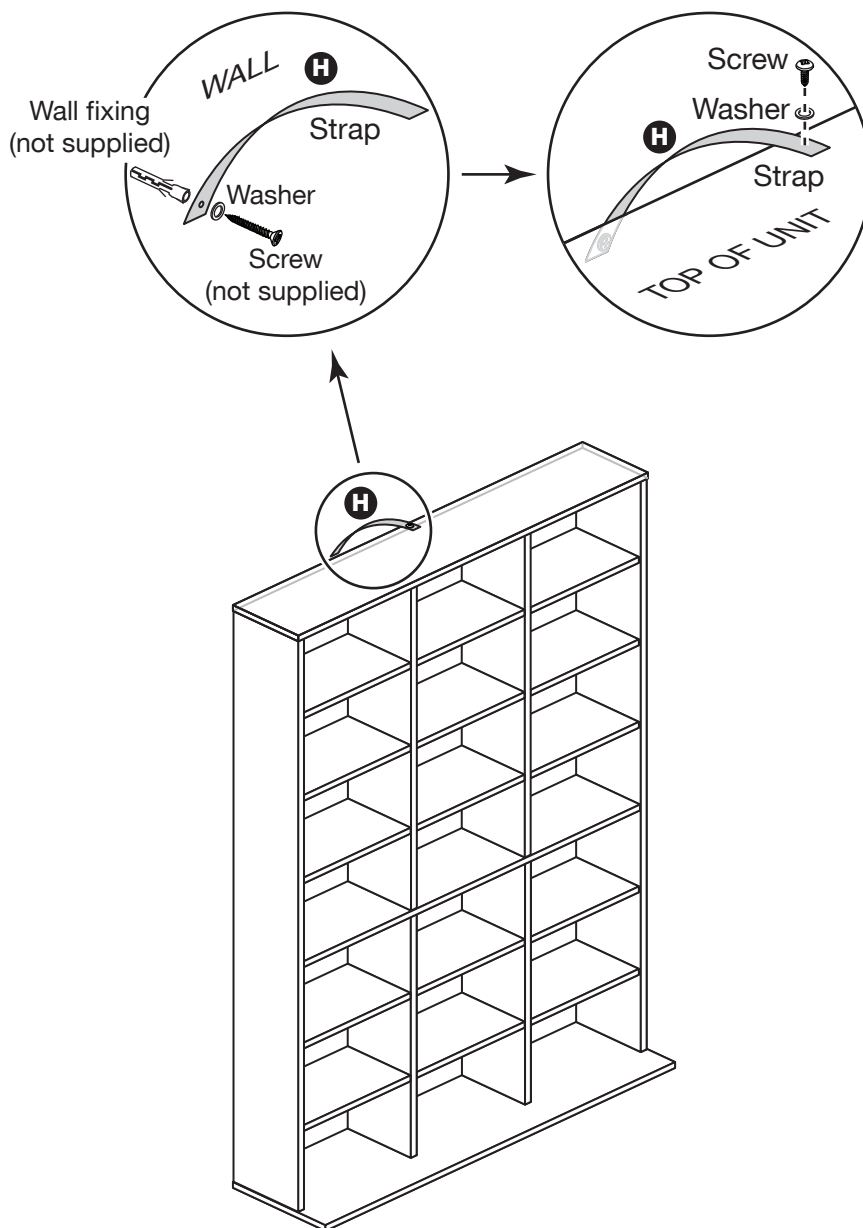

If you need help or have damaged or missing parts, call the Customer Helpline: 03456 400800 and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW