
Atlas - Triple Robe Carcass

Assembly Instructions - Please keep for future reference

147/1999

145/7229

157/6760

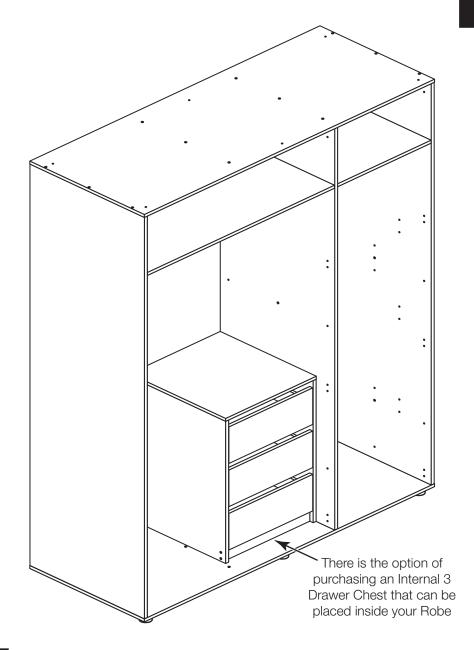

Dimensions

Width - 150cm

Depth - 59.5cm

Height - 212.5cm

IMPORTANT

The unit MUST be fixed to a wall using both of the brackets supplied.



Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- *Warning:* This unit weighs approximately 65kgs. Please lift with care.
- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



• We do not recommend the use of power drill/drivers *for inserting screws*,

as this could damage the unit. Only use hand screwdrivers.

- Safety note: It is recommended that this unit is secured to a wall using the bracket supplied.
- Dispose of all packaging carefully and responsibly.

Care and maintenance


- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.


Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** *quoting the reference numbers below*

Please check you have all the panels listed below

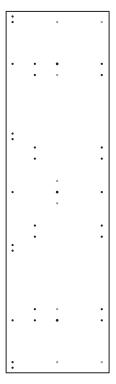

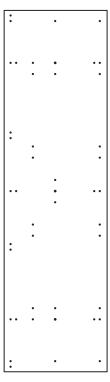



3 Top/Base (D2652A) (1499 x 592mm) x 2



1 Universal End (D2396A) (2074 x 591mm) x 2

2 Upright (D2653A) (2074 x 591mm)






5 Small Fixed Shelf (D2654A) (484 x 590mm)




7 Large Hanging Rail (FHR960)

(960mm long) x 2

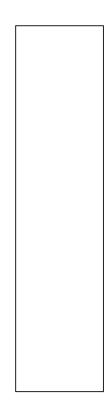

8 Small Back (X2100-504) (2100 x 504mm)

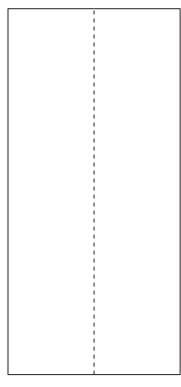

9 Large Back (X2100-988) (2100 x 988mm)





Components - Fittings

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

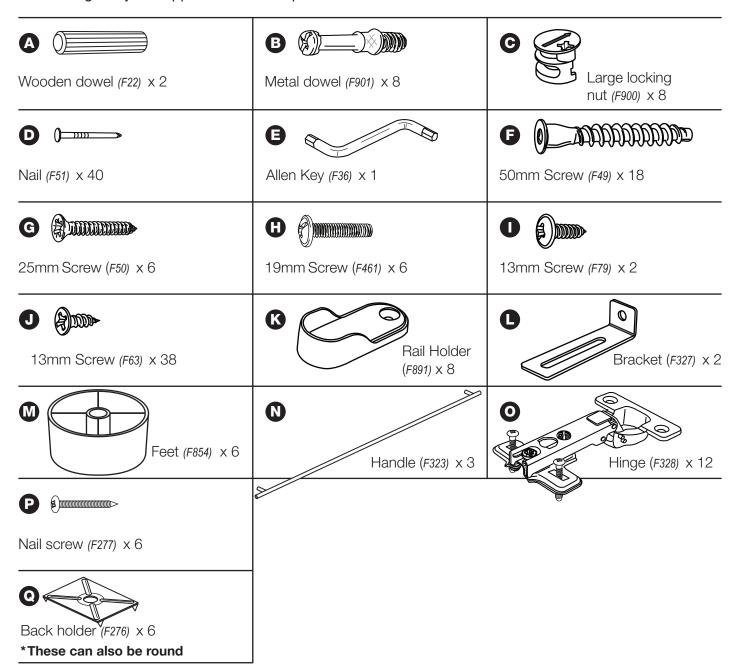


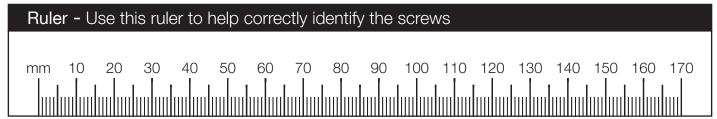

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below

Step 1

Are you fitting 1 or 2 hanging rails or, a shelf pack?

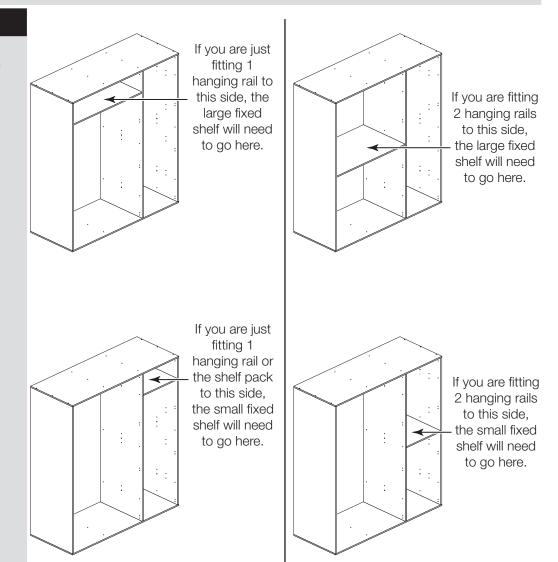

Step 2

Prepare the upright


Screw 2 metal dowels **B** into the upright **2**.

Note: Tighten the metal dowels up fully against the panels.


Note: If you have purchased a shelf pack, do not fit the rail holder.

To fit the rail holder (K), screw through its top hole with screw (1) and into the shallow mark hole drilled in the upright (2). Make sure that it is fitted straight, in line with the panel edges and then fit another screw (1) using the lower hole.

Refer to Step 1 and ONLY FOLLOW THIS STEP if you are fitting the small fixed shelf near the top of the unit.

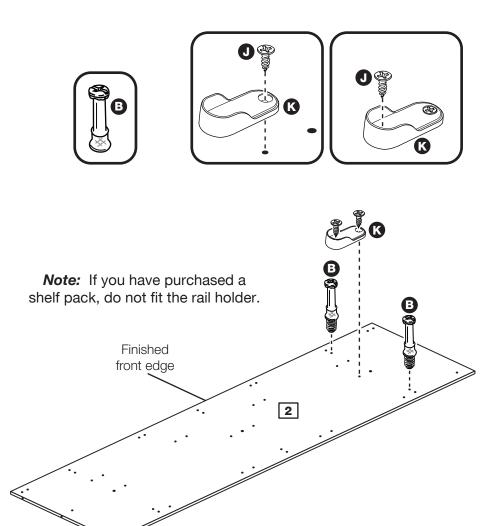

Please ensure you have your panel in exactly the same orientation as the picture above and use the 2 inside holes for screws B as shown in the picture.



Step 3

Prepare the upright


Screw 2 metal dowels **B** into the upright **2**.

Note: Tighten the metal dowels up fully against the panels.

Note: If you have purchased a shelf pack, do not fit the rail holder.

To fit the rail holders (K), screw through their top hole with screw (1) and into the shallow mark hole drilled in the upright (2). Make sure that it is fitted straight, in line with the panel edges and then fit another screw (1) using their lower hole.

Refer to Step 1 and ONLY FOLLOW THIS STEP if you are fitting the small fixed shelf near the middle of the unit.

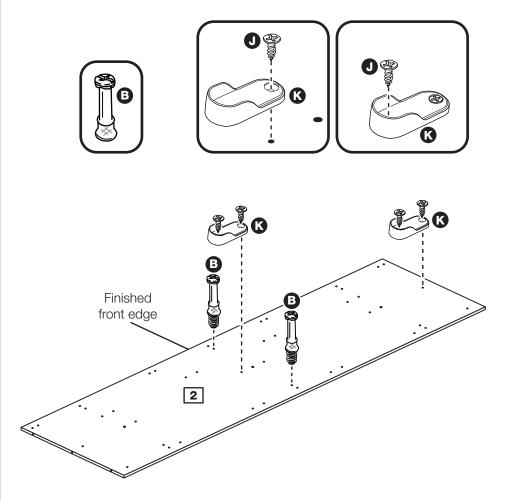

Please ensure you have your panel in exactly the same orientation as the picture above and use the 2 inside holes for screws B as shown in the picture.



Turn the upright over and carry out either step 4 or 5

Step 4


Prepare the upright

Screw 2 metal dowels **B** into the upright **2**.

Note: Tighten the metal dowels up fully against the panels.

To fit the rail holder (K), screw through its top hole with screw (1) and into the shallow mark hole drilled in the upright (2). Make sure that it is fitted straight, in line with the panel edges and then fit another screw (1) using the lower hole.

Refer to Step 1 and ONLY FOLLOW THIS STEP if you are fitting the large fixed shelf near the top of the unit.

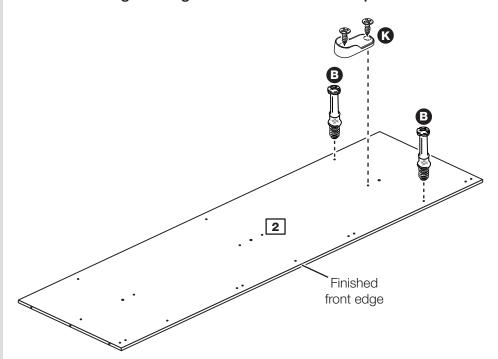

Step 5

Prepare the upright


Screw 2 metal dowels **B** into the upright **2**.

Note: Tighten the metal dowels up fully against the panels.

Note: If you have purchased a shelf pack, do not fit the rail holder.

To fit the rail holders (K), screw through their top hole with screw (1) and into the shallow mark hole drilled in the upright (2). Make sure that it is fitted straight, in line with the panel edges and then fit another screw (1) using their lower hole.

Refer to Step 1 and ONLY FOLLOW THIS STEP if you are fitting the large fixed shelf near the middle of the unit.

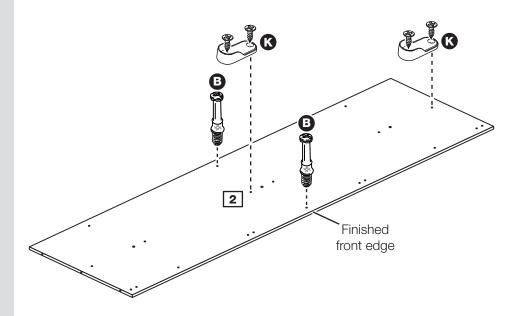

Step 6


Prepare the large fixed shelf

Tap 2 wooden dowels **A** into the large fixed shelf **4**.

Note: Wooden dowels must not stick out from the edge by more than 10mm or they may damage other panels.

Insert 4 large locking nuts **©** into the large fixed shelf **4**.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

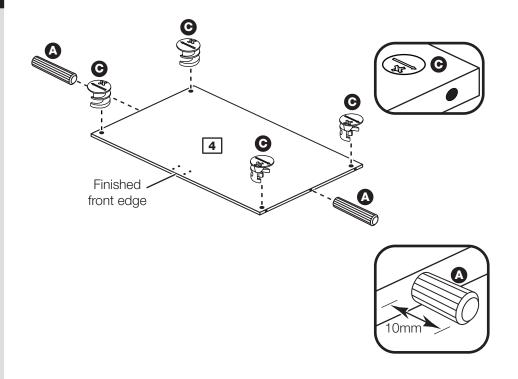

Step 7


Join the large fixed shelf to the upright

Push the large fixed shelf

4 onto the upright 2.

Use a screwdriver to tighten the 2 large locking nuts • fitted to the large fixed shelf • 1.


Note: Turn the large locking nuts **©** as far as they will go - more than 1/2 a turn.

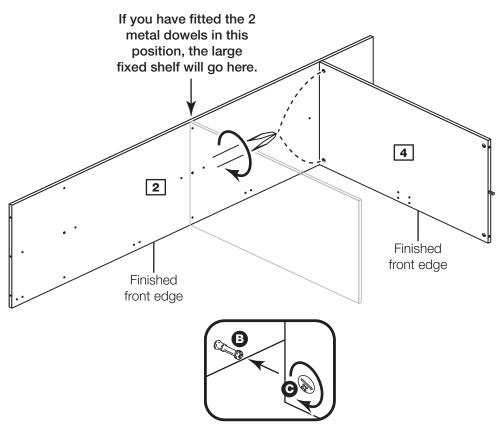

Step 8

Prepare the small fixed shelf

Insert 4 large locking nuts (2) into the small fixed shelf (5).

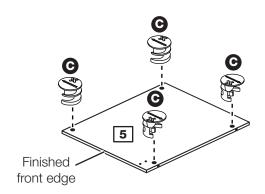

The following assembly diagrams will show the 2 fixed shelves at the top end of the unit.

You may have fitted 1 or both of them in the middle of the unit.


Step 9

Join the small fixed shelf to the upright

Push the small fixed shelf 5 onto the upright 2.

Use a screwdriver to tighten the 2 large locking nuts **©** fitted to the small fixed shelf **5**.

Note: Turn the large locking nuts **©** as far as they will go - more than 1/2 a turn.

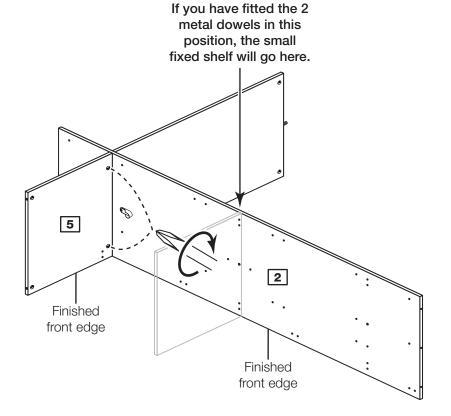


Step 10

Prepare the right end

Screw 2 metal dowels **B** into the right end **1**.

To fit the rail holder (K), screw through its top hole with screw (J) and into the shallow mark hole drilled in the right end (T). Make sure that it is fitted straight, in line with the panel edges and then fit another screw (J) using the lower hole.

ONLY FOLLOW THIS STEP if you have fitted the small fixed shelf near the top of the upright.

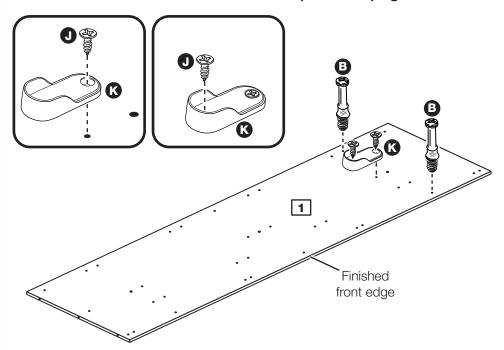

Step 11


Prepare the right end


Screw 2 metal dowels **B** into the right end **1**.

Note: Tighten the metal dowels up fully against the panels.

To fit the 2 rail holders screw through the top hole with screw and into the shallow mark hole drilled in the right end Make sure that they are fitted straight, in line with the panel edges and then fit another screw using the lower hole.

ONLY FOLLOW THIS STEP if you have fitted the small fixed shelf in the middle of the upright.

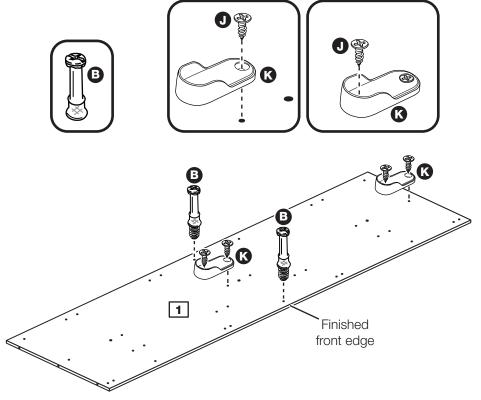

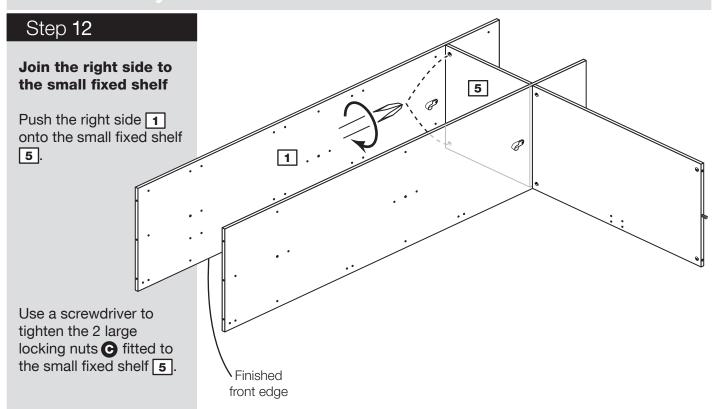

Step 13


Prepare the left end

Screw 2 metal dowels **B** into the left end **1**.

Note: Tighten the metal dowels up fully against the panels.

To fit the rail holder (K), screw through its top hole with screw (J) and into the shallow mark hole drilled in the left end (1). Make sure that it is fitted straight, in line with the panel edges and then fit another screw (J) using the lower hole.

ONLY FOLLOW THIS STEP if you have fitted the large fixed shelf near the top of the upright.

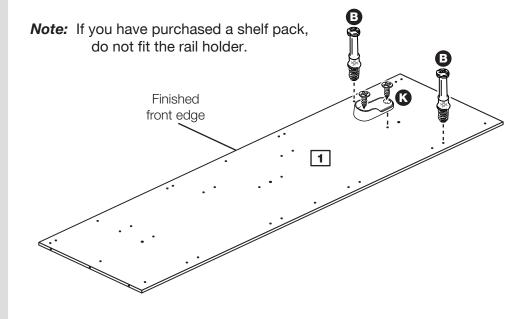

Step 14


Prepare the left end


Refer to step 1 and, if you have chosen to fit 2 hanging rails, screw 2 metal dowels (3) into the left end (1).

Note: Tighten the metal dowels up fully against the panels.

To fit the 2 rail holders screw through the top hole with screw and into the shallow mark hole drilled in the left end Make sure that they are fitted straight, in line with the panel edges and then fit another screw using the lower hole.

ONLY FOLLOW THIS STEP if you have fitted the large fixed shelf in the middle of the upright.

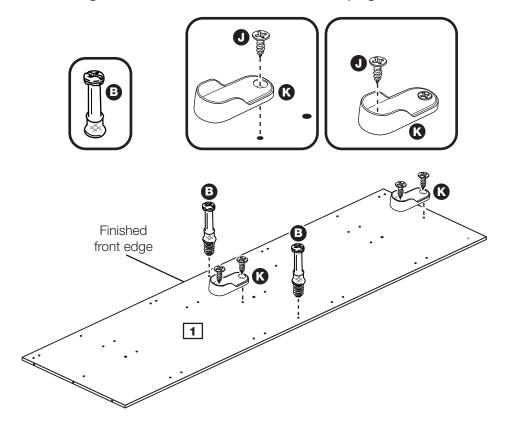


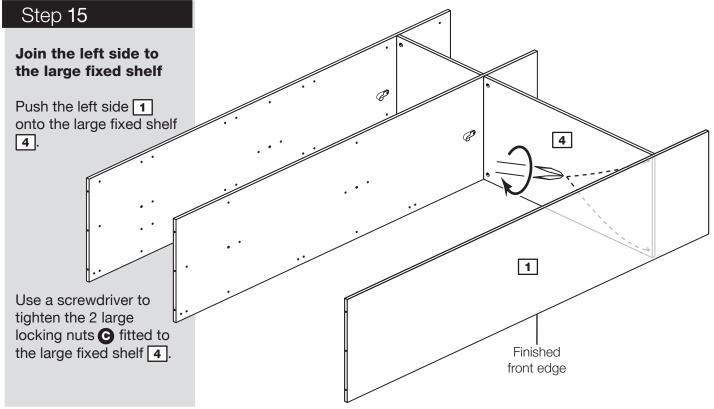


Step 16


Prepare the base

Screw the 6 feet **M** into the shallow mark holes on the base **3** using screws **G**.

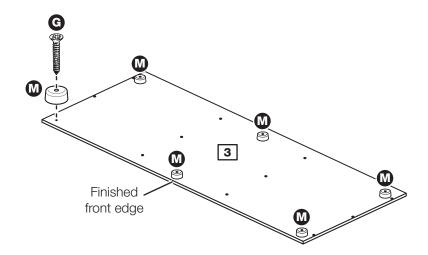

Step 17

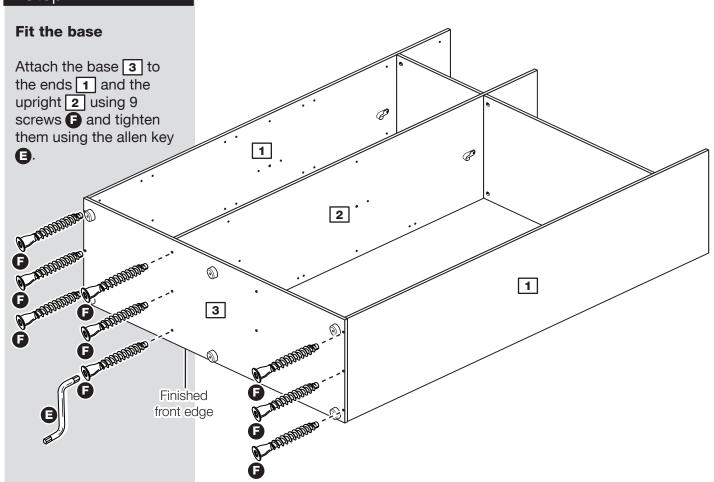

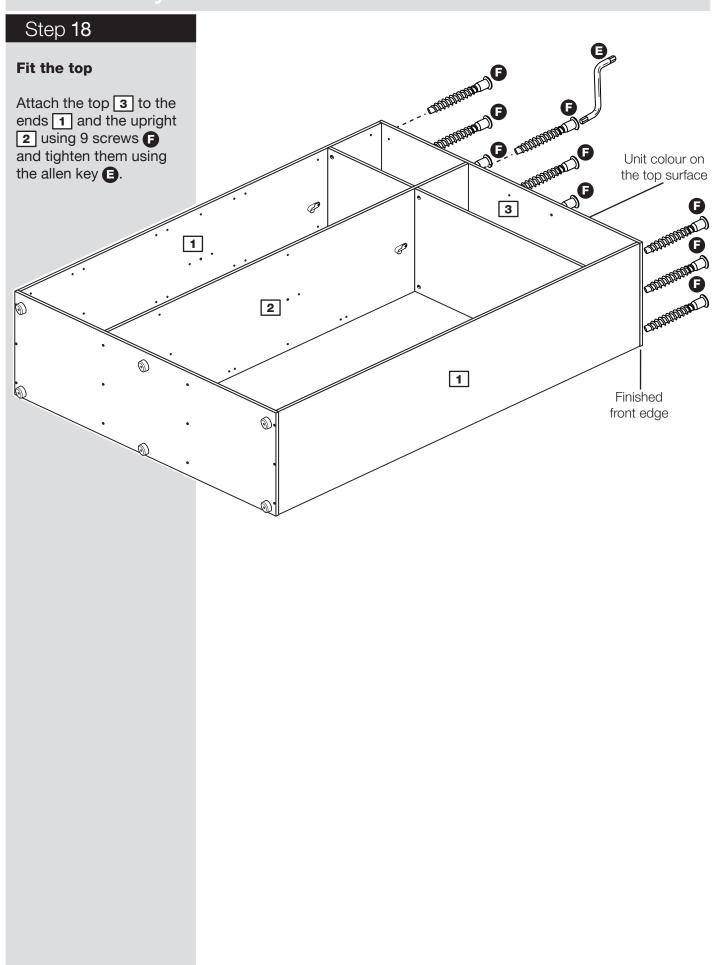

Step 19

Fit the back panels

a: Square up the unit by making sure that the measurement **x:x equals y:y.**

Place the small back 8 and large back 9, coloured surface facing down, onto the unit as shown.

Make sure that the 2 backs are pushed up tight against each other and that they meet in the centre of the divider's back edge.

b: Nail **D** around the outside edges of

Note: Do not nail where the 2 backs meet.


the 2 backs.

C: Push the nail screws
through the back
holders and tap them
down between the small
back and large back
and into the back
edge of the upright 2.


Keep tapping the nail screws **P** in until the back holders **Q** dig into the small and large back.

Stand the unit up for the next step.

The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

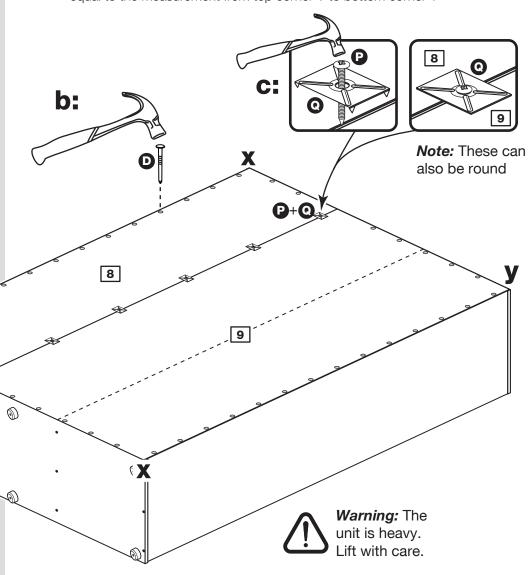


Note: If ever you need to take the backs off to dismantle the unit, the nail screws can be taken out using a screwdriver.



Step 20

Fit the hanging rail(s)

If required, push the hanging rail(s) 6 and 7 into the rail holders K fitted to the panels.

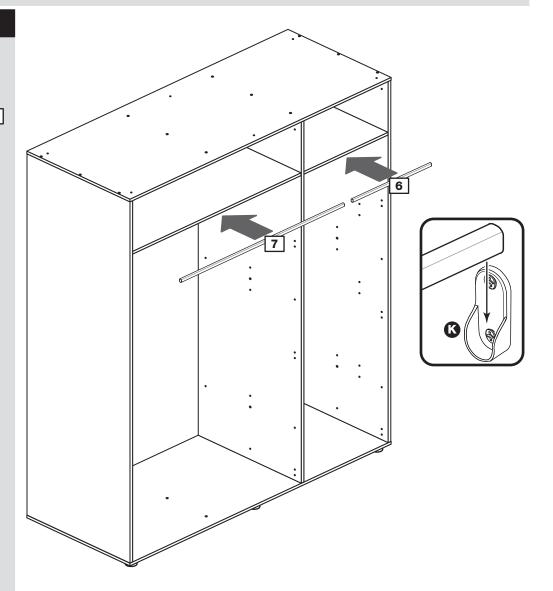

Step 21

Fit the 2 brackets

To prevent possible overbalancing, we recommend that this unit is secured to a suitable wall by use of the 2 brackets • fitted to the top of the unit.

Fixings are not supplied, as they will need to suit the wall type and the length of screws will depend on the distance from the back of the unit to the wall.

Fix the brackets loosely onto the top of the unit using screws and mark the wall for the wall fixing.

Swivel the brackets away from the wall and drill the holes in the wall using a suitable drill bit and fit your wall fixings.

Swivel the brackets back and fix the brackets to the wall, then tighten the screws 1.


Note: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.



Warning: The unit is heavy. Lift with care.

IMPORTANT

This unit MUST be fixed to a wall using both of the brackets supplied. The unit must be level and square before fitting the brackets.

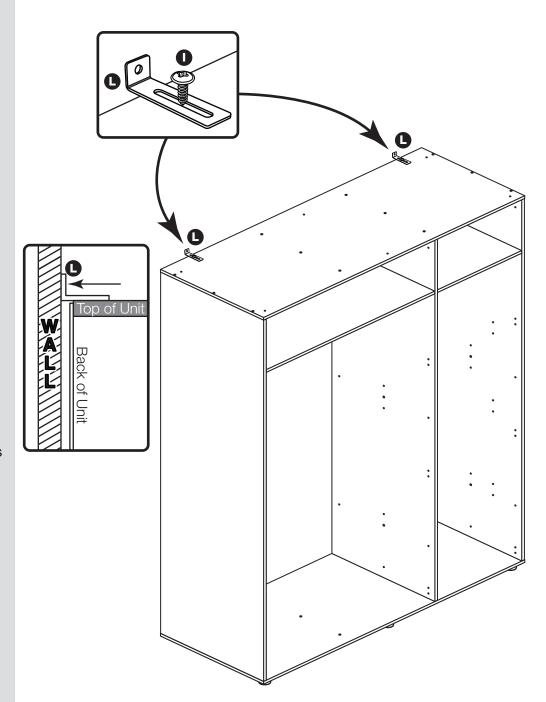


NOTE

The unused fittings from this assembly are used to fit the doors. Please refer to the instructions packed with the doors.

Step 22

Fit the doors and, if required, the shelf pack and internal chest

Please refer to the instructions packed with the doors, shelf pack or internal chest.

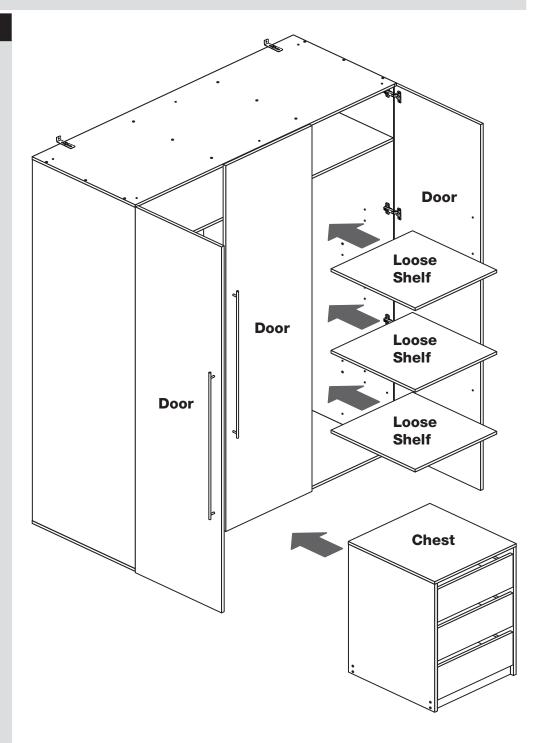

IMPORTANT

The unused fittings from this assembly are used to fit the doors. Please refer to the instructions packed with the doors.

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800** and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW


Atlas - Triple Robe Carcass

Assembly Instructions - Please keep for future reference

147/1999

145/7229

157/6760

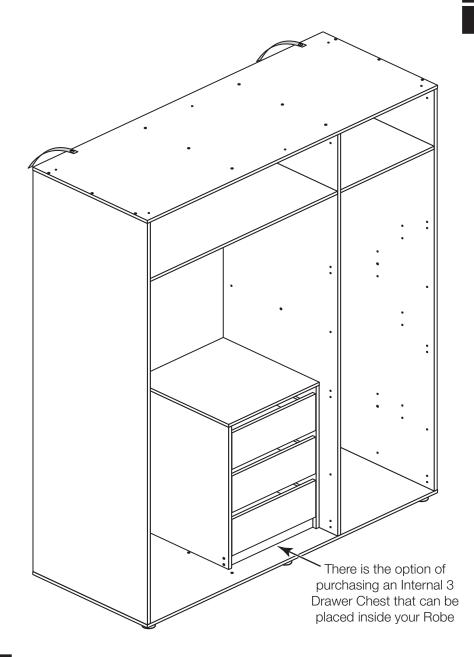

Dimensions

Width - 150cm

Depth - 59.5cm

Height - 212.5cm

IMPORTANT

The unit MUST be fixed to a wall using both of the overbalance protector kits supplied.



Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 03456 400800



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Warning: This unit weighs approximately 65kgs.
 Please lift with care.
- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



• We do not recommend the use of power drill/drivers *for inserting screws*,

as this could damage the unit. Only use hand screwdrivers.

- Safety note: It is recommended that this unit is secured to a wall using both of the overbalance protector kits supplied or, an alternative fixing method of your choice.
- Dispose of all packaging carefully and responsibly.

Care and maintenance


- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.


Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you have damaged or missing components, call the Customer Helpline: 03456 400800 quoting the reference numbers below

Please check you have all the panels listed below

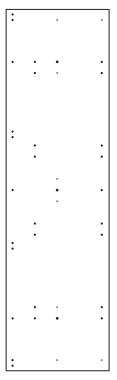

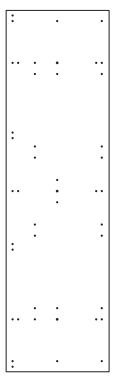

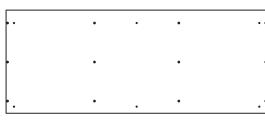

3 Top/Base (D2652A) (1499 x 592mm) x 2



1 Universal End (D2396A) (2074 x 591mm) x 2


Upright (D2653A) (2074 x 591mm)






5 | Small Fixed Shelf (D2654A) (484 x 590mm)



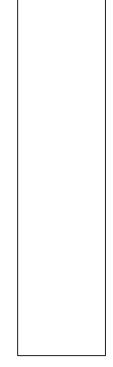

8 | Small Back (X2100-504) (2100 x 504mm)

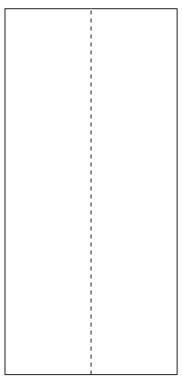

9 Large Back (X2100-988) (2100 x 988mm)




7 Large Hanging Rail (FHR960) (960mm long) x 2


Components - Fittings

If you have damaged or missing components, call the **Customer Helpline: 03456 400800** quoting the reference numbers below

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

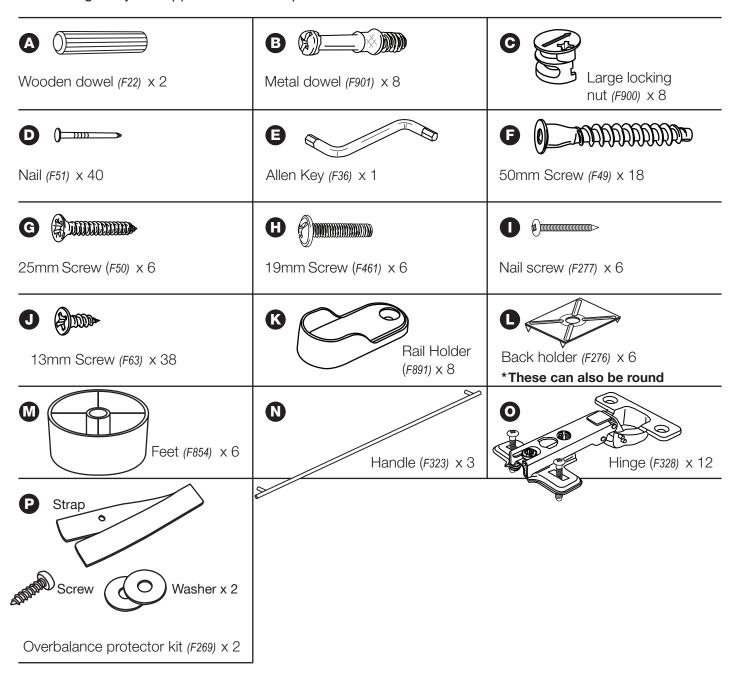


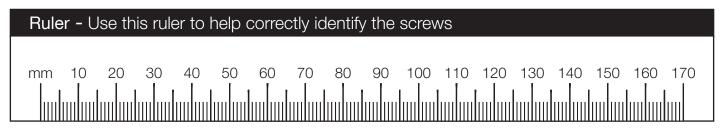

If you have damaged or missing components, call the **Customer Helpline: 03456 400800** quoting the reference numbers below

Step 1

Are you fitting 1 or 2 hanging rails or, a shelf pack?

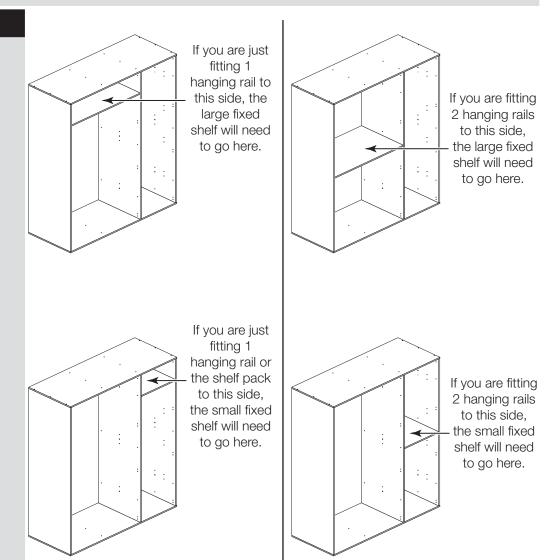

Step 2

Prepare the upright


Screw 2 metal dowels **B** into the upright **2**.

Note: Tighten the metal dowels up fully against the panels.


Note: If you have purchased a shelf pack, do not fit the rail holder.

To fit the rail holder (K), screw through its top hole with screw (1) and into the shallow mark hole drilled in the upright (2). Make sure that it is fitted straight, in line with the panel edges and then fit another screw (1) using the lower hole.

Refer to Step 1 and ONLY FOLLOW THIS STEP if you are fitting the small fixed shelf near the top of the unit.

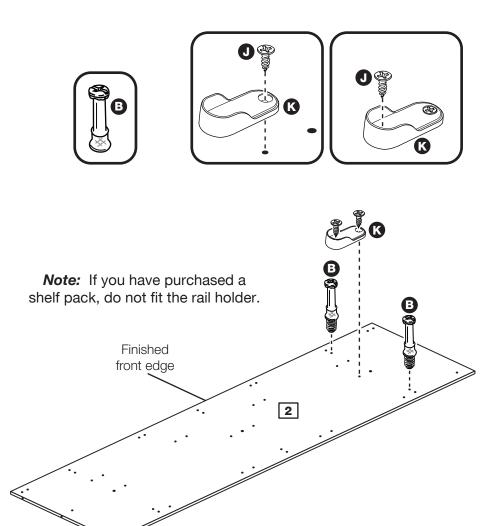

Please ensure you have your panel in exactly the same orientation as the picture above and use the 2 inside holes for screws B as shown in the picture.



Step 3

Prepare the upright


Screw 2 metal dowels **B** into the upright **2**.

Note: Tighten the metal dowels up fully against the panels.

Note: If you have purchased a shelf pack, do not fit the rail holder.

To fit the rail holders (K), screw through their top hole with screw (1) and into the shallow mark hole drilled in the upright (2). Make sure that it is fitted straight, in line with the panel edges and then fit another screw (1) using their lower hole.

Refer to Step 1 and ONLY FOLLOW THIS STEP if you are fitting the small fixed shelf near the middle of the unit.

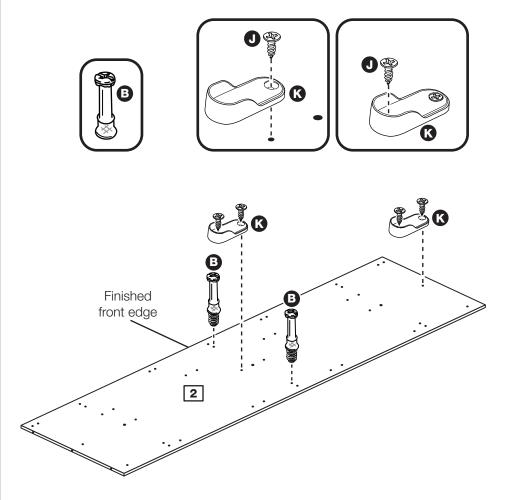

Please ensure you have your panel in exactly the same orientation as the picture above and use the 2 inside holes for screws B as shown in the picture.



Turn the upright over and carry out either step 4 or 5

Step 4


Prepare the upright

Screw 2 metal dowels **B** into the upright **2**.

Note: Tighten the metal dowels up fully against the panels.

To fit the rail holder (K), screw through its top hole with screw (1) and into the shallow mark hole drilled in the upright (2). Make sure that it is fitted straight, in line with the panel edges and then fit another screw (1) using the lower hole.

Refer to Step 1 and ONLY FOLLOW THIS STEP if you are fitting the large fixed shelf near the top of the unit.

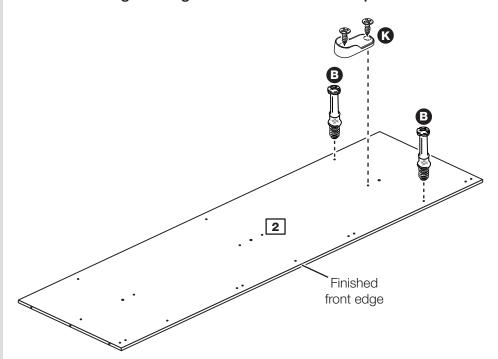

Step 5

Prepare the upright


Screw 2 metal dowels **B** into the upright **2**.

Note: Tighten the metal dowels up fully against the panels.

Note: If you have purchased a shelf pack, do not fit the rail holder.

To fit the rail holders (K), screw through their top hole with screw (1) and into the shallow mark hole drilled in the upright (2). Make sure that it is fitted straight, in line with the panel edges and then fit another screw (1) using their lower hole.

Refer to Step 1 and ONLY FOLLOW THIS STEP if you are fitting the large fixed shelf near the middle of the unit.

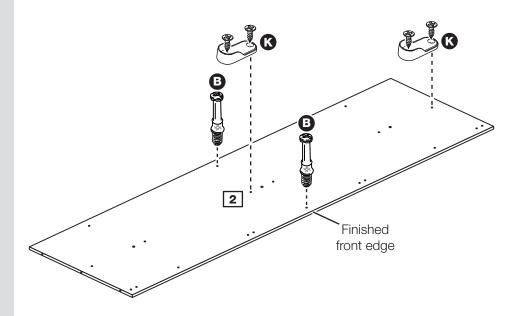

Step 6


Prepare the large fixed shelf

Tap 2 wooden dowels **A** into the large fixed shelf **4**.

Note: Wooden dowels must not stick out from the edge by more than 10mm or they may damage other panels.

Insert 4 large locking nuts **©** into the large fixed shelf **4**.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

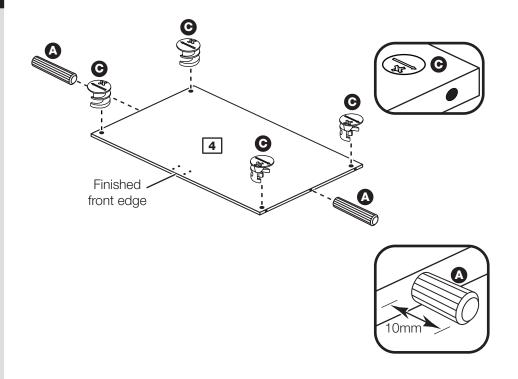

Step 7


Join the large fixed shelf to the upright

Push the large fixed shelf

4 onto the upright 2.

Use a screwdriver to tighten the 2 large locking nuts • fitted to the large fixed shelf • 1.


Note: Turn the large locking nuts **©** as far as they will go - more than 1/2 a turn.

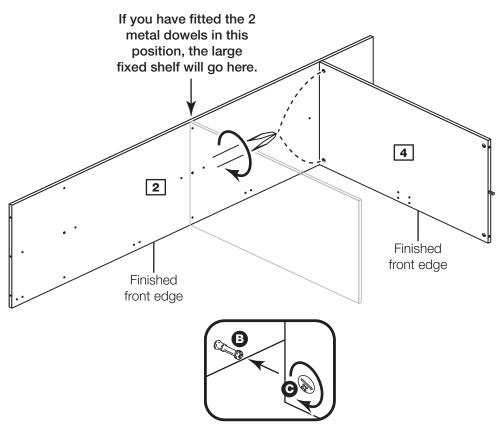

Step 8

Prepare the small fixed shelf

Insert 4 large locking nuts (2) into the small fixed shelf (5).

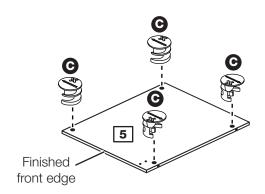

The following assembly diagrams will show the 2 fixed shelves at the top end of the unit.

You may have fitted 1 or both of them in the middle of the unit.


Step 9

Join the small fixed shelf to the upright

Push the small fixed shelf 5 onto the upright 2.

Use a screwdriver to tighten the 2 large locking nuts **©** fitted to the small fixed shelf **5**.

Note: Turn the large locking nuts **©** as far as they will go - more than 1/2 a turn.

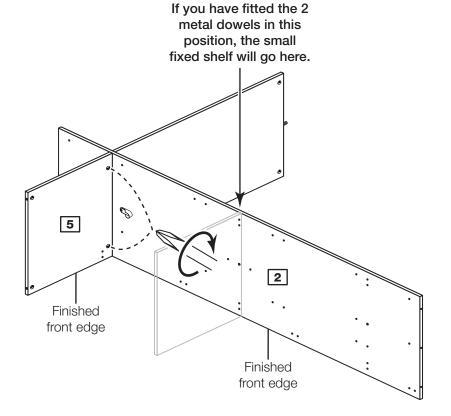


Step 10

Prepare the right end

Screw 2 metal dowels **B** into the right end **1**.

To fit the rail holder (K), screw through its top hole with screw (J) and into the shallow mark hole drilled in the right end (T). Make sure that it is fitted straight, in line with the panel edges and then fit another screw (J) using the lower hole.

ONLY FOLLOW THIS STEP if you have fitted the small fixed shelf near the top of the upright.

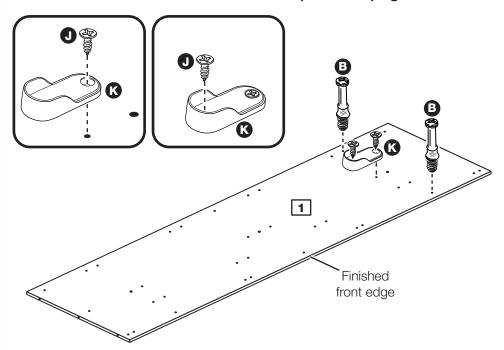

Step 11


Prepare the right end


Screw 2 metal dowels **B** into the right end **1**.

Note: Tighten the metal dowels up fully against the panels.

To fit the 2 rail holders screw through the top hole with screw and into the shallow mark hole drilled in the right end Make sure that they are fitted straight, in line with the panel edges and then fit another screw using the lower hole.

ONLY FOLLOW THIS STEP if you have fitted the small fixed shelf in the middle of the upright.

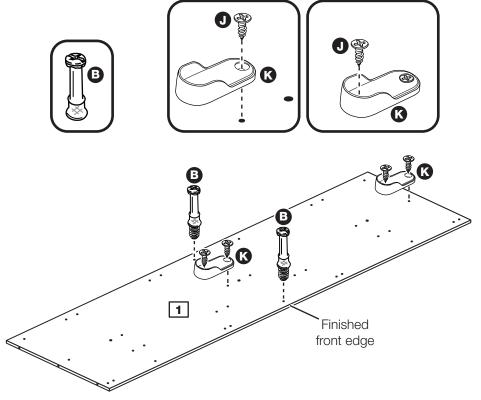

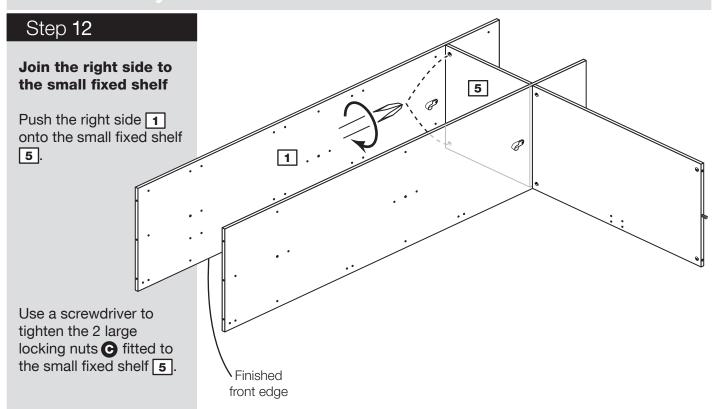

Step 13


Prepare the left end

Screw 2 metal dowels **B** into the left end **1**.

Note: Tighten the metal dowels up fully against the panels.

To fit the rail holder (K), screw through its top hole with screw (J) and into the shallow mark hole drilled in the left end (1). Make sure that it is fitted straight, in line with the panel edges and then fit another screw (J) using the lower hole.

ONLY FOLLOW THIS STEP if you have fitted the large fixed shelf near the top of the upright.

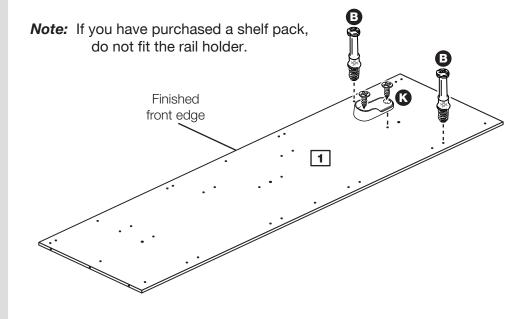

Step 14


Prepare the left end


Refer to step 1 and, if you have chosen to fit 2 hanging rails, screw 2 metal dowels (3) into the left end (1).

Note: Tighten the metal dowels up fully against the panels.

To fit the 2 rail holders screw through the top hole with screw and into the shallow mark hole drilled in the left end Make sure that they are fitted straight, in line with the panel edges and then fit another screw using the lower hole.

ONLY FOLLOW THIS STEP if you have fitted the large fixed shelf in the middle of the upright.

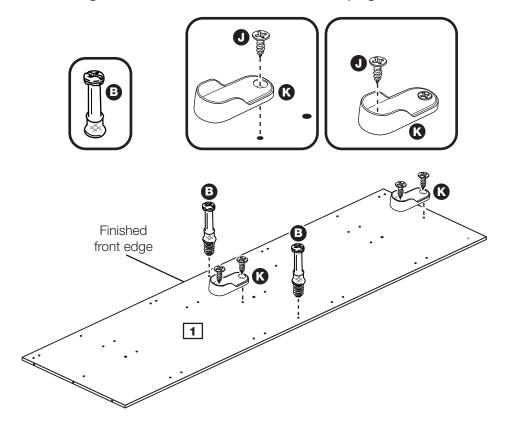


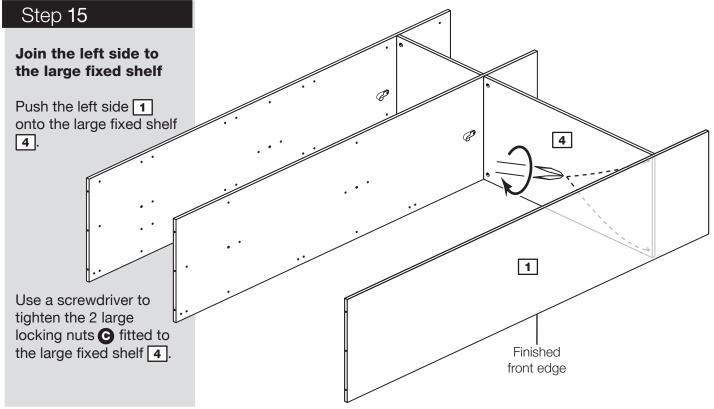


Step 16


Prepare the base

Screw the 6 feet **M** into the shallow mark holes on the base **3** using screws **G**.

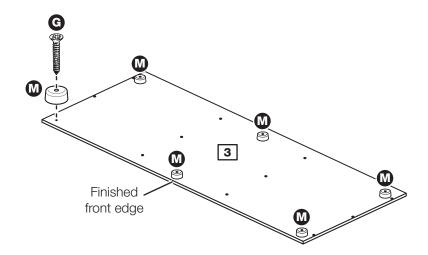

Step 17

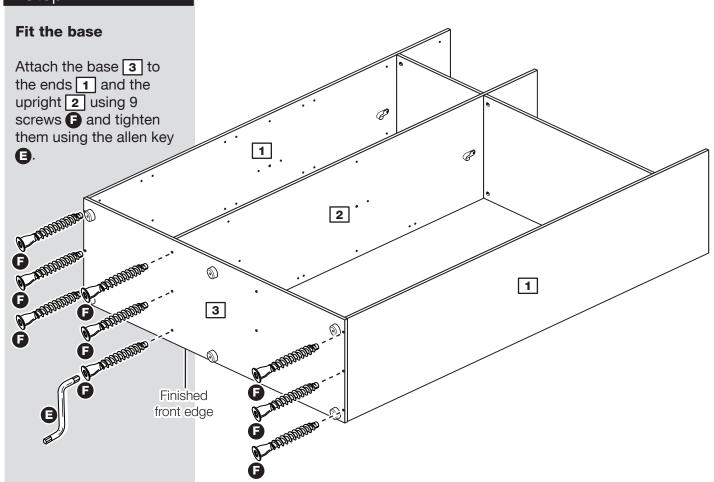

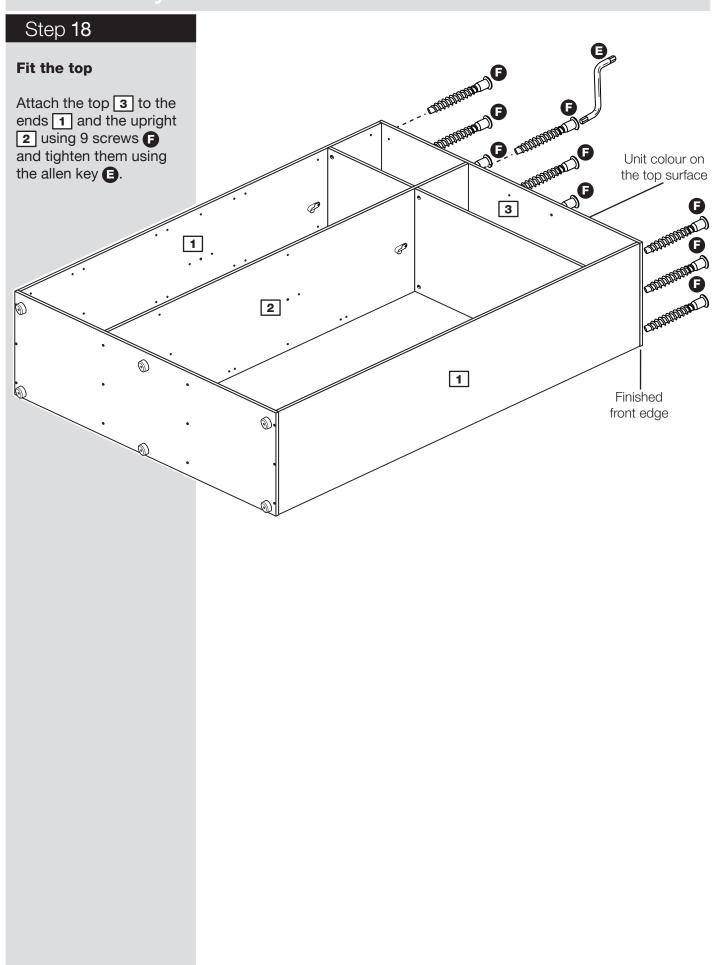

Step 19

Fit the back panels

a: Square up the unit by making sure that the measurement **x:x equals y:y.**

Place the small back 8 and large back 9, coloured surface facing down, onto the unit as shown.

Make sure that the 2 backs are pushed up tight against each other and that they meet in the centre of the divider's back edge.

entre of the divider's ack edge.

b: Nail **o** around the outside edges of the 2 backs.


Note: Do not nail where the 2 backs meet.

through the back holders and tap them down between the small back and into the back edge of the upright 2.


Keep tapping the nail screws in until the back holders dig into the small and large back.

Stand the unit up for the next step.

The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

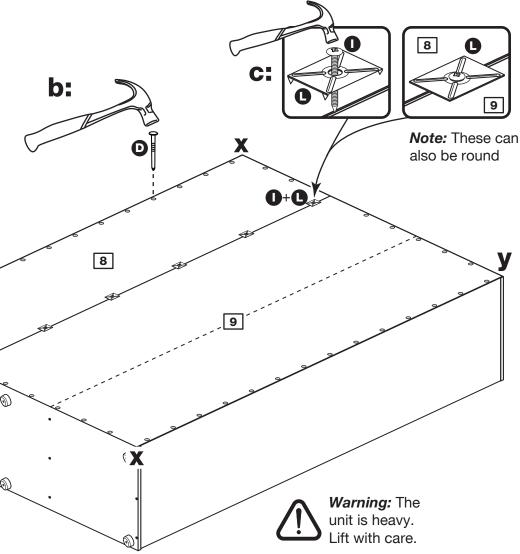


Note: If ever you need to take the backs off to dismantle the unit, the nail screws can be taken out using a screwdriver.



Step 20

Fit the hanging rail(s)

If required, push the hanging rail(s) 6 and 7 into the rail holders K fitted to the panels.

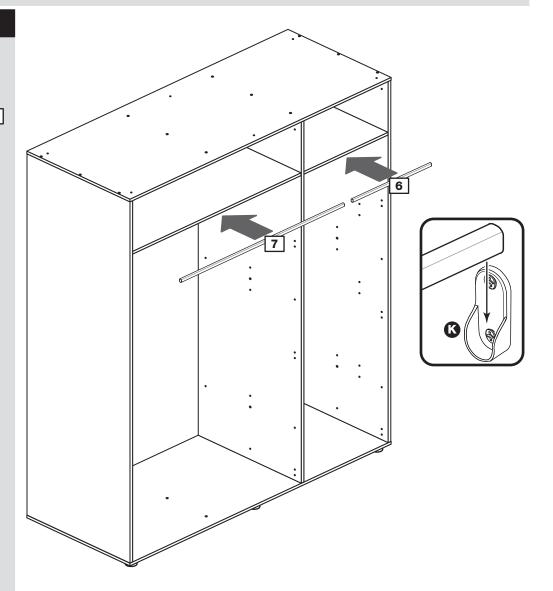

Step 21

Fit both of the overbalance protector kits


To prevent possible overbalancing we recommend that this unit is secured to a suitable wall by fitting of both of the overbalance protector kits to the unit, or an alternative fixing method of your choice.

Wall fixings are not supplied as they will need to suit the wall type.

Note: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

IMPORTANT

This unit MUST be fixed to a wall using both of the overbalance protector kits supplied. The unit must be level and square before fitting the overbalance protector kits.

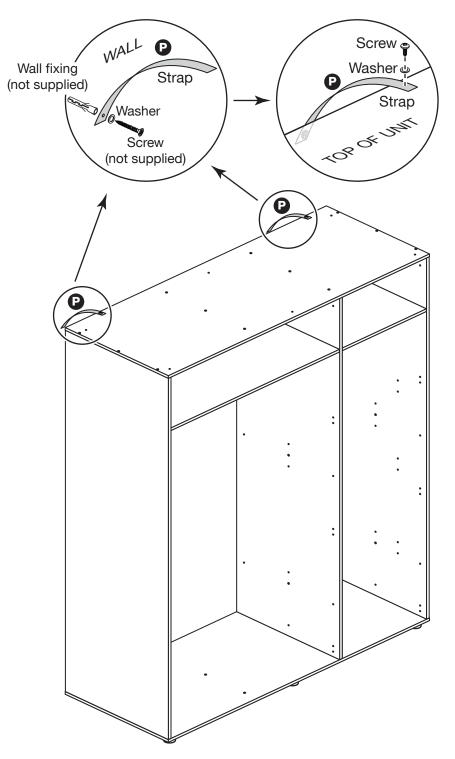


NOTE

The unused fittings from this assembly are used to fit the doors. Please refer to the instructions packed with the doors.

Step 22

Fit the doors and, if required, the shelf pack and internal chest

Please refer to the instructions packed with the doors, shelf pack or internal chest.

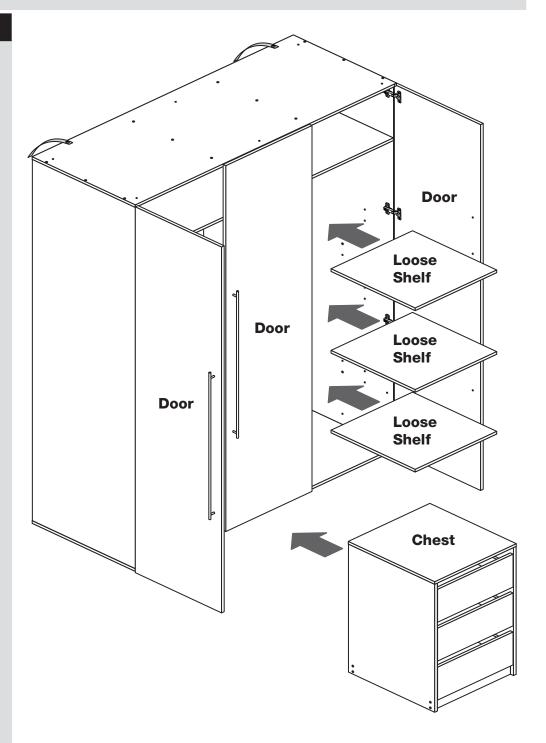

IMPORTANT

The unused fittings from this assembly are used to fit the doors. Please refer to the instructions packed with the doors.

If you need help or have damaged or missing parts, call the **Customer Helpline:** 03456 400800 and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW


Atlas - Single Mirror Door

Assembly Instructions - Please keep for future reference

157/5709

IMPORTANT

Have you purchased a Single Robe and an Internal 3 Drawer Chest?
The Chest must be placed into the Robe BEFORE the Door is fitted.



Width - 49.5cm

Depth - 1.5cm

Height - 210cm



Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- *Warning:* This panel weighs approximately 22kgs. Please lift with care.
- Check you have all the components and tools listed on pages 2.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



• We do not recommend the use of power drill/drivers *for inserting screws*,

as this could damage the unit. Only use hand screwdrivers.

- Safety note: If there is any chance of this unit being pulled over by children etc. it is recommended that the unit is secured to a wall using suitable fixings (not supplied).
- Dispose of all packaging carefully and responsibly.


Care and maintenance

- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Component - Panel

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below

Please check you have the panel listed below

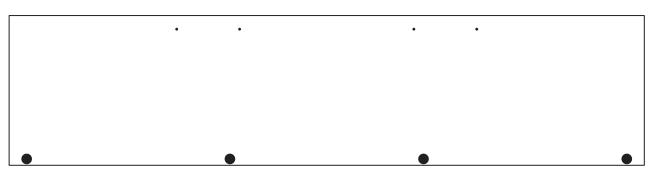

Mirror Door (D2398MA) (2100 x 495mm) Mirror - SG23 2099 x 494mm Safety Back SAR

Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 08456 400800** *quoting the reference numbers below*

These fittings are packed with the Single Mirror Door.





13mm Screw (F52) x 2






These fittings are packed with the Robe Carcass. The quantities will depend on which robe you have bought.





13mm Screw (F63)





If you have damaged or missing components, call the Assembly Instructions Customer Helpline: 08456 400800 quoting the reference

Step 1

Do not drill the Mirror Door?

IMPORTANT

DO NOT drill any holes in the Mirror Door.

If you have purchased a Standard Door please use the instructions packed with it.

Step 2


Prepare the door(s)

Lay the door down onto a soft, smooth surface.

Push fit 4 hinges o into each door.

Secure each hinge with 2 screws J.

Note: Before securing with the screws, make sure that the hinges are positioned at 90 degrees with the edge of the door.

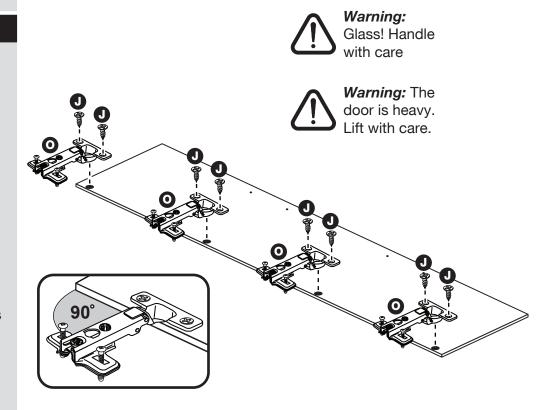

Step 3

Fit the door(s)


2 people are needed here

Line up the 2 screws in the top hinge • with the 2 holes at the top of the panel and push them in.


Working down the door, push in the other hinges.

When all of the hinges have been pushed into place, tighten the 2 screws on each hinge.

Press the screws into the holes in the panels




When the hinges have been pushed in, tighten up their screws



Choose where you would like your mirror door.

This shows a door being fitted onto the right side of a single robe.

The same assembly method applies to all doors and robes.

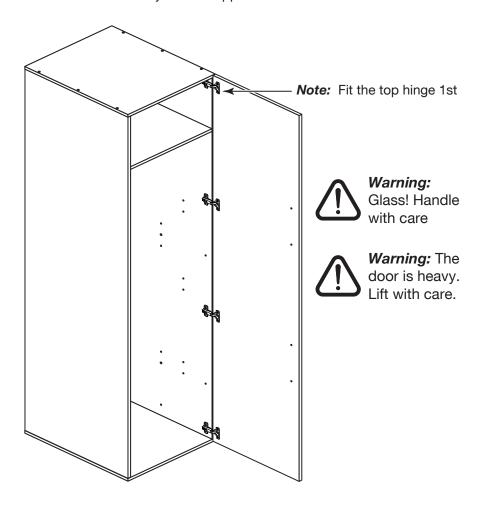

Step 4

Adjust the door if needed

a: Before adjusting the door, use a spirit level to check the top (or base) of the unit is level, front-to-back and side-to-side in the 3 positions shown. Use suitable packing pieces (not supplied) to make the unit level BEFORE making any adjustment to the hinges, as shown.

b: Height adjustment.


Loosen screws A on hinge plates and move door up or down as required. Retighten screw A.

C: Forward and Back adjustment.

Loosen screw B on hinge plate and move door in or out as required. Retighten screw B.

d: Sideways adjustment.

To move door 'out' loosen screw C.
To move door 'in' tighten screw C.

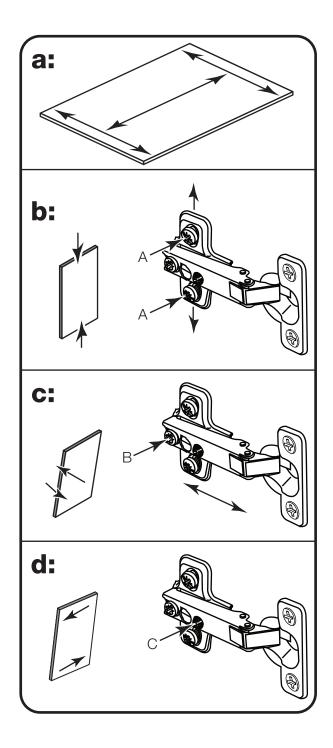

Step 5

Fit the Door Push

a: The arrows show the Door Push fixing positions on each of the Atlas Robes.

These are pairs of holes on the underside of the Fixed Shelves.

Make sure you choose the correct position so that the Mirror Door closes onto the Door Push.

b: Fit a door plate **Y** for each mirror door to the fixed shelf using 2 screws **X**.

Press the door push **2** into the door plate **Y**.


Press the back of the door push 2 to click into place.

C: To open and close a mirror door, press it where the door push is located.


You can adjust the door push, in or out, by turning it clockwise or anti-clockwise to suit your requirements.

These diagrams show the fixed shelves at the top end of the units.

You may have fitted them in the middle of the unit.

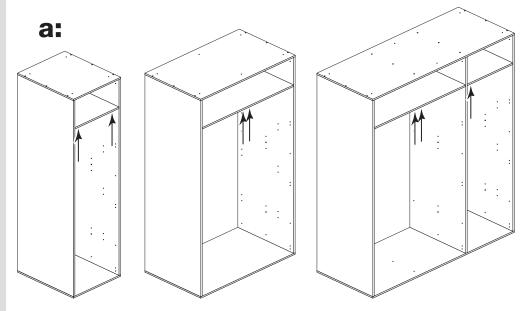

b:

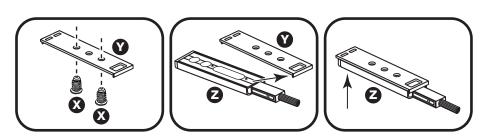

C:



Step 6

Important information

IMPORTANT INFORMATION ABOUT THIS PRODUCT

This product complies with the requirements of BS 7449:1991 and has been manufactured by DECORATIVE PANELS FURNITURE LTD, TEESSIDE INDUSTRIAL ESTATE, THORNABY-ON-TEES, CLEVELAND, TS17 9LT.

The product code for this unit and the item code(s) for the glass components are listed in the Assembly Instructions along with a description of the type of glass used. All clear/tinted glass complies with the requirements of BS 6206 Class A. All mirrors comply with the requirements of BS 6206 Class C. If the glass component contained in this unit is chipped or broken consult the furniture manufacturer, retailer, or agent with regard to obtaining a manufacturing specification and shape for replacement glass quoting the unit description and batch number or date of manufacture.

Do not place very hot or very cold items against or in close proximity to glass surface(s) unless adequately thick insulating material is used to prevent such items coming in contact with the glass.

Do not strike the glass with hard or pointed items.

Do not sit or stand upon horizontal glass surfaces.

When cleaning glass panels use a damp cloth or leather with washing up liquid or soft soap if necessary - do not use washing powders or any other substance containing abrasives since these substances scratch glass.

If stated in the instruction leaflet, it is essential that this unit is fixed to a wall.

KEEP THESE INSTRUCTIONS FOR FUTURE USE

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800 and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

7 ALR2960


Atlas - Standard Double Door

Assembly Instructions - Please keep for future reference

151/7396

157/2063

157/7240

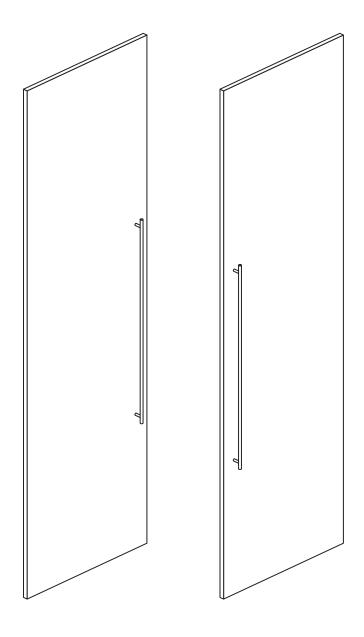

Dimensions for each door

Width - 49.5cm

Depth - 1.5cm

Height - 210cm



Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- *Warning:* These panels weigh approximately 22kgs. Please lift with care.
- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



 We do not recommend the use of power drill/drivers for inserting screws,

as this could damage the unit. Only use hand screwdrivers.

- Safety note: If there is any chance of this unit being pulled over by children etc. it is recommended that the unit is secured to a wall using suitable fixings (not supplied).
- Dispose of all packaging carefully and responsibly.

Care and maintenance


- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

Component - Panel

If you have damaged or missing components, call the Customer Helpline: 08456 400800 quoting the reference numbers below


Please check you have the panel listed below

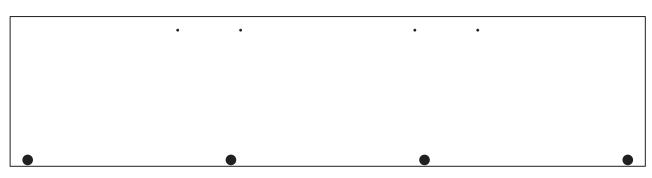

Standard Door (D2398A) (2100 x 495mm) x 2

If you have damaged or missing components, call the Components - Fittings Customer Helpline: 08456 400800 quoting the reference

These fittings are packed with the Robe Carcass. The quantities will depend on which robe you have bought.

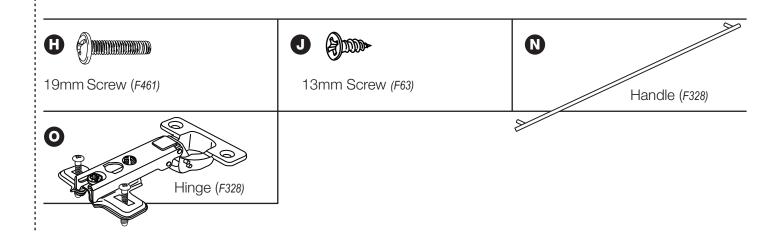



If you have damaged or missing components, call the Assembly Instructions Customer Helpline: 08456 400800 quoting the reference numbers below

Step 1

Have you purchased a **Mirror Door?**

IMPORTANT

If you have purchased a Mirror Door, DO NOT follow these instructions. Please use the instructions packed with the Mirror Door.


Step 2

Prepare the doors

Push fit 4 hinges **O** into each door.

Secure each hinge with 2 screws J.

Note: Before securing with the screws, make sure that the hinges are positioned at 90 degrees with the edge of the door.

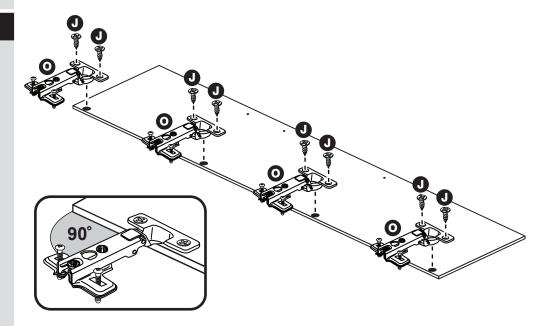

Step 3

For a door which has a handle on the left, drill these 2 handle holes

Important: Please follow these instructions carefully.

Lay the door down onto a smooth surface.

Check that the hinges and holes are in the same place as the diagram.

Note: We recommend the use of a small piece of waste wood, placed behind the holes while drilling, to reduce the possibility of any breakout.


Using the pilot holes in the rear face of the door, drill through the 2 holes indicated opposite, using a 2.5mm diameter drill.

Turn the door over and open out the 2.5mm holes that you have just drilled by drilling back through them with a 5mm drill.


IMPORTANT

This step shows which handle holes to drill for doors that have their handles on the LEFT, as shown below.

Go to Step 4 for how to drill a door with its handle on the RIGHT.

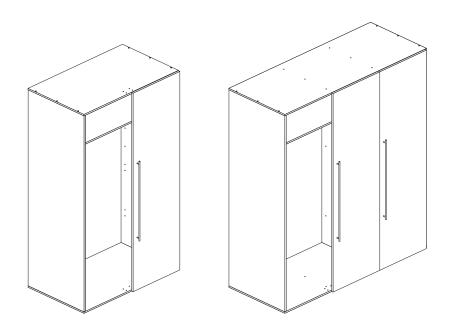

ONLY drill these 2 holes

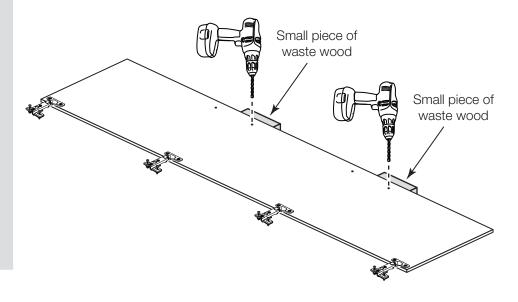

Step 4

For a door which has a handle on the right, drill these 2 handle holes

Important: Please follow these instructions carefully.

Lay the door down onto a smooth surface.

Check that the hinges and holes are in the same place as the diagram.

Note: We recommend the use of a small piece of waste wood, placed behind the holes while drilling, to reduce the possibility of any breakout.


Using the pilot holes in the rear face of the door, drill through the 2 holes indicated opposite, using a 2.5mm diameter drill.

Turn the door over and open out the 2.5mm holes that you have just drilled by drilling back through them with a 5mm drill.


IMPORTANT

This step shows which handle holes to drill for doors that have their handles on the RIGHT, as shown below.

Go to Step 3 for how to drill a door with its handle on the LEFT.

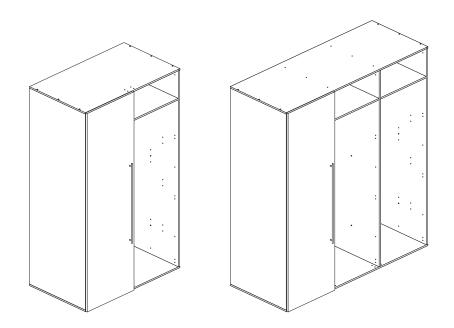

ONLY drill these 2 holes

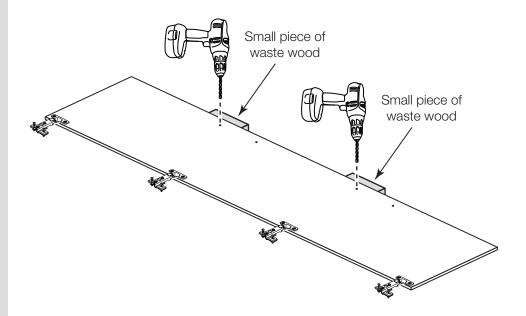

Step 5

Fit the doors and the handles

2 people are needed here

Make sure that the doors are the correct way around. The bottom hole on the back surface of the door will be one of holes that you have drilled.


Line up the 2 screws in the top hinge • with the 2 holes at the top of the panel and push them in.

Working down the door, push in the other hinges.


When all of the hinges have been pushed into place, tighten the 2 screws on each hinge.

Attach a handle N to each door using 2 screws H.


Press the screws into the holes in the panels



When the hinges have been pushed in, tighten up their screws



This shows a door being fitted onto the right side of a double robe. The same assembly method applies to all doors and robes.

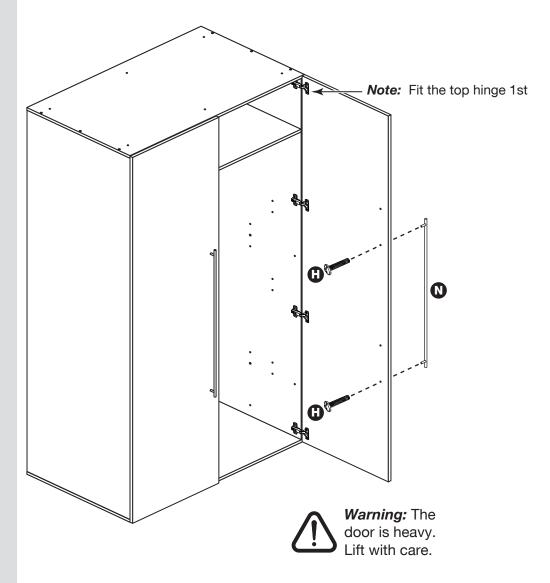

Step 6

Adjust the doors if needed

a: Before adjusting the doors, use a spirit level to check the base (or top) of the unit is level, front-to-back and side-to-side in the 3 positions shown.

Use suitable packing pieces (not supplied) to make the unit level BEFORE making any adjustment to the hinges, as shown.

b: Height adjustment.


Loosen screws A on hinge plates and move door up or down as required. Retighten screw A.

C: Forward and Back adjustment.

Loosen screw B on hinge plate and move door in or out as required. Retighten screw B.

d: Sideways adjustment.

To move door 'out' loosen screw C.
To move door 'in' tighten screw C.

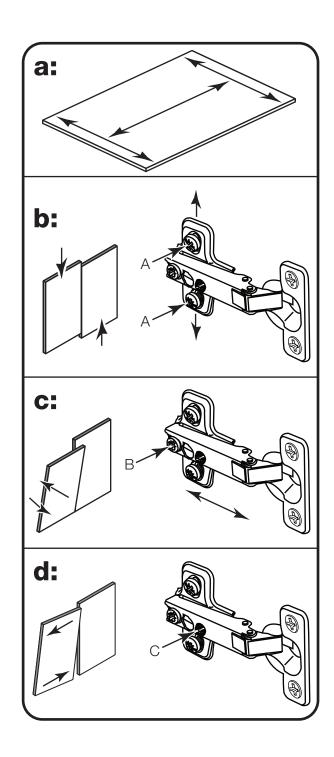

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800** and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

7 ALR2961